



johansson
since 1962

What it means to be **market leader**?

Taking technology to higher levels, setting new standards and offering **the best solutions** all over the globe.

Patented innovations that boost your business.

The Profiler Revolution proves that we revolutionized the terrestrial filter-amplifier technology, making us the reference in the market.

Johansson is also the market leader for other technologies, such as dSCR, wideband distribution and RED-compliant 5G amplifiers.

New standards and new products

In this Johansson catalogue, we present you our new Digital Modular Headend, Profiler Revolution range, digital SCR Multiswitches and LTE(5G)-protected TV accessories. We also present the most complete range of satellite wideband distribution products, a technology that is getting more and more incorporated in satellite systems.

A world-wide impact

The technology market keeps moving forward. So does Unitron, with a range of over 250 telecommunication, multimedia and IoT solutions. Currently selling in more than 70 countries, we reach tens of millions of TV viewers on a daily basis. Perhaps even you?

Offering you the best

With our broad range, we are highly motivated to provide supreme TV-experiences all over the world. 100% of our customers* agree with the high quality level of our products, that's why they deserve our quality label.

Elisabeth Lamaire & Philippe Lamaire
Managing Directors



INDEX | JOHANSSON

▶ Digital Modular Headends	04
▶ Compact Headends	18
▶ Digital SCR / Legacy Solutions	26
▶ Wideband Satellite Distribution	46
▶ Profilers	54
▶ Satellite Fiber Distribution	60
▶ Amplifiers	62
▶ Distribution Accessories	74

*According to satisfaction survey conducted with Johansson customers in 2018, 2017, 2016, 2015 and 2014.

All specifications in this catalogue are subject to change without notice.

Digital Modular Headends

- ▶ Unitron is proud to present you the newest Johansson range of Digital Modular Headends. You can use them in all your projects, thanks to their flexible configuration. They are compatible with all platforms: satellite, cable, terrestrial, IP and HDMI. With the new Remote Management Unit, control, monitoring and alarming (e-mail notifications) is possible. Our newest Digital Modular Headend consists of multiple rack-mountable modules and accessories.

- Satellite module - ProFlex (ref. 5500-5501)
- HDMI module - ProHDMI (ref. 5520-5530-5531)
- Cable and Terrestrial module - ProCAT (ref. 5510)
- Remote Management Unit - RMU (ref. 5951-5952)
- AV-modules
- Accessories including new Mini-Rack with integrated fan unit (ref. 5066W)

Our professional Digital Modular Headends have already been **sold in more than 50 countries** worldwide. 100% of our customers agree on the high quality level of our products.

This Headend will make your hospitality solutions more successful. Our plug-and-play Headends distribute signals, in all types of buildings, over RF and IP networks.

We offer a complete range of products: ProFlex, ProHDMI, ProCAT, Remote Management Unit, Headend Accessories,.... This means that our Headends are tailored to satisfy all your project needs!



DVBS

DVBS2

DVBT

DVBC

DVBT2

ISDBT

HDMI

REMOTE MANAGEMENT

INDEX

DIGITAL MODULAR HEADENDS

5500	ProFlex Versatile Headend Module	06	
5501	ProFlex Versatile Headend Module	06	NEW
5510	ProCAT	07	
5520	ProHDMI Streamer	08	
5530	ProHDMI Modulator	09	
5531	ProHDMI Modulator	09	
5951	Remote Management Unit	10	
5952	RMU Smart Power Supply	10	NEW
5330	ProQuad AV to COFDM	13	
5380	ProQuad AV to QAM	13	
5230	ProStreamer AV to IPTV 4	14	
5240	ProStreamer SD/HD Encoder	15	
5050W	Power Supply Unit	16	
5051W	Power Supply Unit	16	
5062W	Fan Unit	17	
5065W	19" Sub-Rack	17	
5066W	Mini-Rack with integrated fan unit	17	NEW



Digital Modular Headends

NEW

5500 - 5501 ProFlex Versatile Modular Headend

The new satellite module has 4 inputs allowing the reception of 4 different satellite bands per module. Because the module has 8 satellite tuners and a built-in multiswitch, reception of 8 different transponders coming from any of the 4 input satellite bands is possible.

Depending on the type of configuration, up to 8 DVB-T/C multiplexes, 4 MPTS or 64 STPS streams can be distributed per module, offering you one of the most flexible and cost-efficient solutions available on the market!

5500 | 5501

- versatile: one module for multiple applications
- flexible: tailor-made configuration
- future proof: configuration upgradable
- scalable: feature upgradable
- feature activation can be time based
- **5501**: module with up to 4 CAM slots and 8 Muxes
- configure remotely with uCloud via RMU (ref. 5951/5952)



Backside of Ref. 5501



NEW

5500 | 5501

Input:		
Inputs	-	4 x satellite (4 satellite bands per module) 1 IP Gigabit input (4 MPTS transport streams per module)
Integrated multiswitch	-	Yes, allows flexible routing of satellite programs to multiplexes (QAM or COFDM)
Configuration	-	Built-in webserver or with uCloud via RMU (ref. 5951/5952)
Remote access	-	via RMU ref. 5951/5952
Encoded programs	-	From all 8 tuners. Can be routed through 1 to 4 CAMs and can be decoded using multi-service CAMs
Output:		
DVB-T output	Mbps	Up to 31.7 / multiplex
DVB-C output	Mbps	Up to 51.3 / multiplex
IP output	-	Up to 4-MPTS transport streams in Unicast
IPTV output	-	Up to 64-SPTS channels in Multicast
General		
Dimensions	-	5 RU x 8 TE x 367 mm

Configuration possibilities	
1	DVB-S/S2 to DVB-C
2	DVB-S/S2 to DVB-T
3	DVB-S/S2 to IPTV
4	DVB-S/S2 to IP
5	IP to DVB-C
6	IP to DVB-T

Features possibilities		
1	#Tuners	1 to 8
2	#Mux	1 to 8
3	#CAM	0, 1, 2, 3, 4
4	#SPTS	16, 32, 48, 64
5	#MPTS	1 to 4

Digital Modular Headends

5510 ProCAT Cable and Terrestrial module

The **5510** is the professional digital modular headend for cable and terrestrial signals. Perfect picture quality of demodulated transponders on IP or coax.

- receives 1 DVB-T or DVB-C transponder
- decrypts the PayTV channels, when a professional CAM is inserted
- compatible with SD and HD, with MPEG2 and MPEG4
- configure remotely with uCloud via RMU (ref. 5951/5952)

5510



5510

Input:

Number of inputs	-	1 with passive loop-through (-2dB)
Tuner	-	1
Frequency range	MHz	47 - 1002
Input level	dBµV	44 to 89
Standard	-	DVB-T/T2 DVB-C
DC remote power for LNA	V mA	12 or 24 350
Loop-through loss	dB	1.5
Return loss	dB	8
Bandwidth	MHz	8, 7, 6 switchable

Output:

Number of outputs	-	1 RF with passive loop-through (-2 dB) + 1 IP
Multiplex	-	1
Frequency range	MHz	174 - 862
Output level	dBµV	69 to 84 (adjustable)
Standard	-	DVB-T ISDB-T
Modulation Error Rate (MER)	dB	40

General

CI slot	-	1
Input voltage	VDC	15
Power consumption	W	6
Operating temperature	°C	0 to +40
Dimensions	-	5 RU x 8 TE x 367 mm
Weight	kg	1.1
Accessories	-	2 x RF bridge, 2 x DC bridge



Digital Modular Headends

5520 ProHDMI Streamer

The **5520** is a ProHDMI Streamer with 4 HDMI inputs and 1 ethernet streaming port. Stream high quality video and optimize video experience with the ProHDMI streamers. The HDMI to IP is a professional headend encoder with 4 HDMI inputs. By changing the bitrate via the easy-to-use built-in webserver, you can optimize the video experience of your audience.

5520

- 4 HDMI inputs per module
- 1 ethernet IP streaming port
- 1 ethernet management port for system control and configuration
- configure remotely with uCloud via RMU (ref. 5951/5952)



5520

Input:

Number of inputs	-	4 x HDMI 1.3
Video resolution	-	576i up to 1080p
Video encoding	-	H264/AVC
Audio encoding	-	MPEG1 Layer II / AAC
Connector type	-	HDMI Type A

Output:

Standard	-	Ethernet 100 / 1000 Base-T
Protocol	-	ARP, Multicast, ICMP, DHCP
Capacity	-	4 SPTS - 1 MPTS

General

Connectors	-	Front side: Streaming: 1 x RJ-45 (Ethernet) Management: 1 x RJ-45 (Ethernet) DC: Banana sockets Rear side: HDMI Input: 4 x HDMI 1.3
Power supply	VDC	15
Consumption	A	1,2
Operating temperature	°C	0 to +40
Dimensions	-	5 RU x 8 TE x 367 mm



Digital Modular Headends

5530 - 5531 ProHDMI Modulator

The ProHDMI Modulator with 4 HDMI inputs and 1 coaxial output port with up to 2 independent output MUXs (DVB-T/DVB-C/ATSC-T/ATSC-C/DTMB/ISDB-T). Stream high quality video and optimize video experience with the ProHDMI modulators. By changing the bitrate via the easy-to-use built-in webserver, you can optimize the video experience of your audience.

5530 | 5531

- 4 HDMI inputs per module
- 1 coaxial output port with up to 2 independent output MUXs
- 1 ethernet management port for system control and configuration
- configure remotely with uCloud via RMU (ref. 5951/5952)



5530

|

5531

Input:

Number of inputs	-	4 x HDMI 1.3
Video resolution	-	576i up to 1080p
Video encoding	-	H264/AVC
Audio encoding	-	MPEG1 Layer II / AAC
Connector type	-	HDMI Type A

Output:

Modulated channel frequency	MHz	174 - 1218
Output level	dBuV	55 - 99 (adjustable)
MER	dB	Typ. 38

Output setting

Output type	-	DVB-C	DVB-T	DTMB	ATSC-C	ATSC-T	DVB-T	ISDB-T
Bitrate	Mbps	2 - 23				2 - 15	2 - 23	
Channel bandwidth	MHz	2 to 8	6, 7 or 8	8	6	6	6, 7 or 8	6
Constellation	-	16QAM, 32QAM, 64QAM, 128QAM, 256QAM	COFDM (QPSK / 16QAM / 64QAM)	QPSK, QAM-4NR, 16QAM, 32QAM, 64QAM,	64QAM 256QAM	8VSB	COFDM (QPSK / 16QAM / 64QAM)	
Other settings	-	-	Code rate, Guard Interval, 2K-8K	Interleave Code rate 2K-8K Sync frame PN phase	-	-	Code rate, Guard Interval, 2K-8K	

General

Connectors	-	Front side: Output: RF + Loopthrough Management: 1 x RJ-45 (Ethernet) DC: Banana sockets Rear side: HDMI Input: 4 x HDMI 1.3
Power supply	VDC	15
Consumption	A	1,2
Operating temperature	°C	0 to +40
Dimensions	-	5 RU x 8 TE x 367 mm

Digital Modular Headends

NEW

5951 - 5952 Remote Management Unit

The RMU is a very smart and powerful solution that connects with uCloud. uCloud enables you to connect to any of your installations with any PC or Internet-connected device.

5951

- rack-mountable module
- very simple installation (plug-and-play)
- no network knowledge needed
- very cost-efficient solution for remote monitoring and alarming

With uCloud, you can do the following:

- application to manage and configure all your installations remotely
- monitoring of modules
- alarming
- google maps overview of all your installations
- one button-connect to any installation
- add pictures and comments regarding the installation
- safe remote access with certificates and password authentication
- solve problems from wherever you are, no need to go on-site for headend reconfiguration



RMU with integrated power supply for redundancy

NEW

5952

- RMU ref. 5951 with intelligent backup power supply
- input: 90 to 264 VAC
- output: 15 VDC / 10A
- application to manage and configure all your installations remotely
- monitoring of modules and alarming
- use 5050W as primary power supply
- one button-connect to any installation
- safe remote access with certificates and password authentication
- solve problems from wherever you are, no need to go on-site for headend reconfiguration



5951/5952

Connectors	-	DC: banana sockets Control: 1 x RJ-45
LEDs	-	1 x alarm LED 1 x power LED
Power Supply	VDC	15
Consumption	A	0,6
Dimensions	-	5RU x 8TE x 180 mm

COMPATIBLE WITH

5500 ProFlex
5501 ProFlex
5510 ProCAT
5520 ProHDMI
5530 ProHDMI
5531 ProHDMI

Digital Modular Headends

5951 - 5952 Remote Management Unit



Go to <https://remote.uui-platform.com>

The Remote Management Unit (RMU) enables any authenticated user to configure or monitor a specific headend remotely. The RMU is a very smart and powerful solution which connects with a server hosted by us and enables you to connect to any of your installations with any PC or Internet-connected device. Setup of the unit is as simple as it gets:



Put the RMU in the 19" rack.



Connect the RMU to an Internet-connected switch, together with the DMH modules.




Connect the power.



Go to our hosted website, login and enter the unique code visible on the RMU.



You can now connect to this module from wherever you are on any PC!

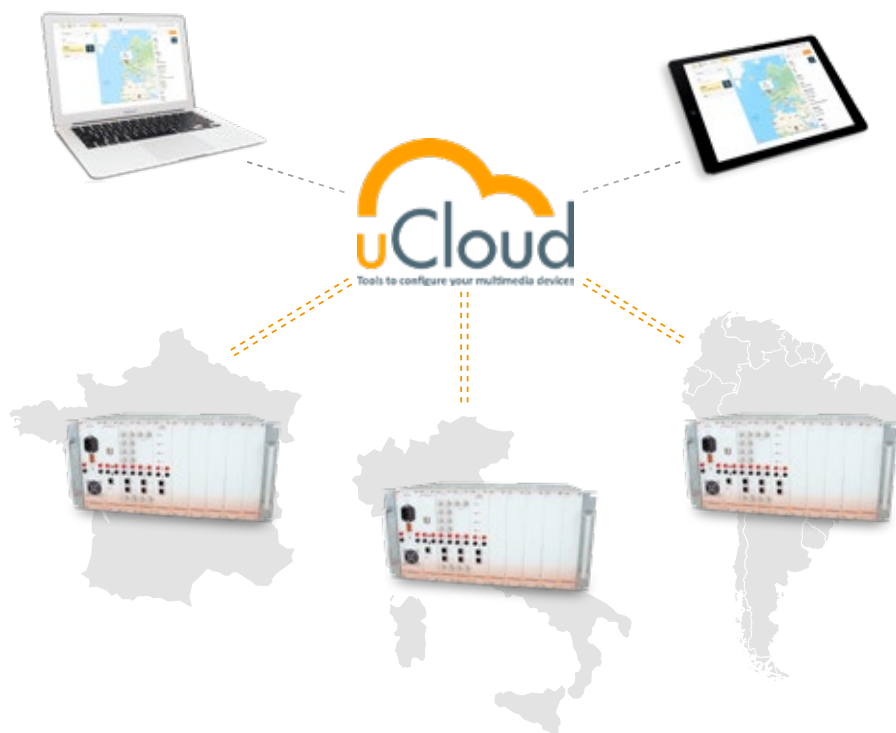

Online platform


- ▶ Online driver library
- ▶ Available 24/7
- ▶ Multitenant architecture
- ▶ Always up to date
- ▶ Automatic device support
- ▶ Future proof

Centralized remote management tool

- ▶ Access all your systems from anywhere in the world
- ▶ Hosted solution: access your installation from every PC without installation
- ▶ Smart and bandwidth-efficient solution: HD screens, even with limited bandwidth
- ▶ Secure connection


Digital Modular Headends

5951 - 5952 Remote Management Unit

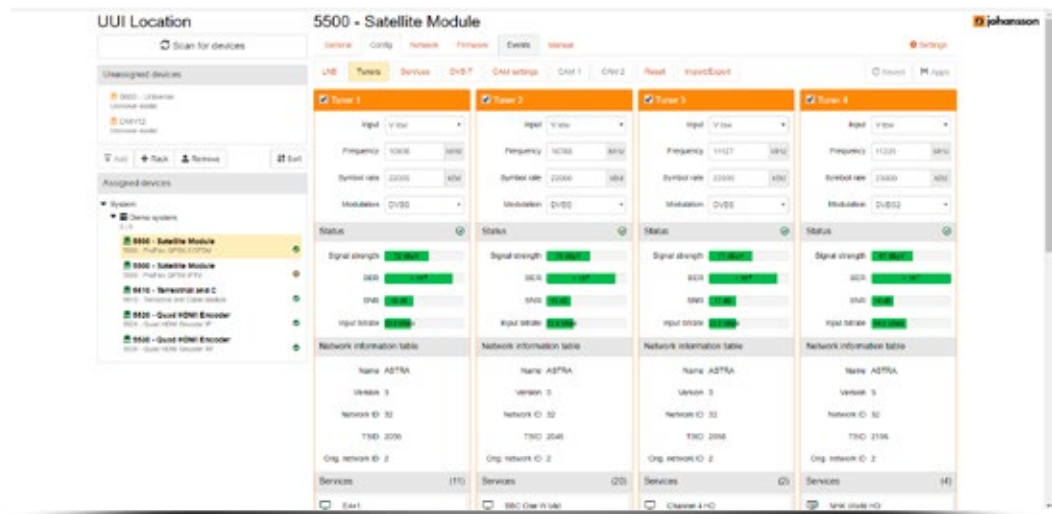

System level management

- automatic device discovery
- overview of all devices in the system
- direct remote connection on system level
- direct device status overview
- hybrid environment: supports configuration of Ethernet and coaxial devices

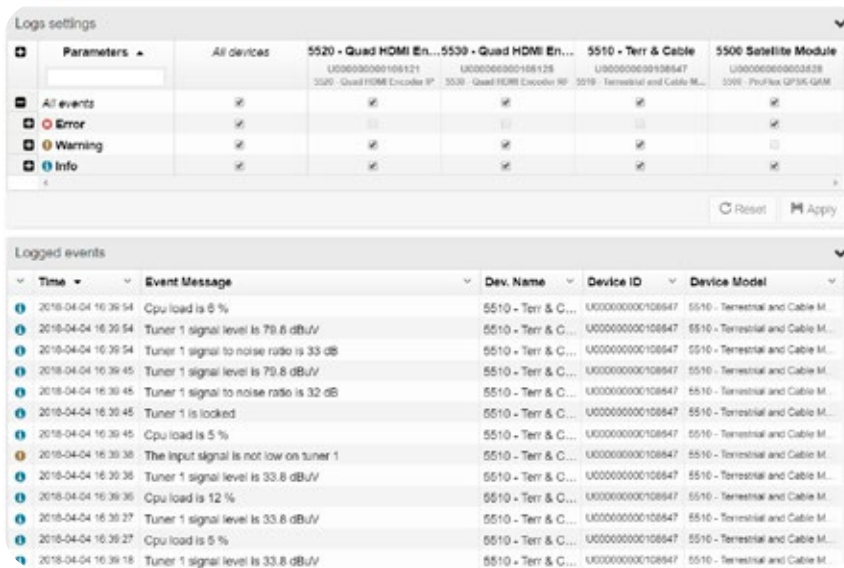

Monitoring and Alarming

- remotely monitor your modules in the field
- receive e-mail notifications based on your own parameter-based triggers
- Solve problems from wherever you are, no need to go on-site for headend reconfiguration

Digital Modular Headends

5330 - 5380 ProQuad AV → COFDM/QAM

ProQuad AV to COFDM modulator module with 4 Stereo Audio-Video inputs and 2 COFDM multiplexes.
ProQuad AV to DVB-C module with 4 inputs, to distribute up to 4 analog video sources over the DVB-C network.

5330 | 5380

- 4 AV Stereo inputs per module
- easy configuration with built-in webserver
- change important parameters: LCN, resolution, brightness, contrast, hue, saturation,...
- ideal solution for CCTV or near-VOD!



5330

|

5380

Input:

Number of inputs	-	4 x AV (CVBS)	
Video processing	-	Conformance with IEC 13818-2 (MPEG2 video) and ISO/IEC 11172-3 (MPEG1 audio) standards	
Video resolution	-	SIF: 352 x 288 SVCD: 480 x 576 HALF D1: 352 x 576 D1: 720 x 576 544: 544 x 576	
Video bitrate	kbps	1500 to 7000 (Typ. 6000)	
Audio volume	dB	-6 to +6 (Typ. 0)	

Output:

Number of outputs	-	1 with 1 loop through (max 1,5 dB loss)	
Frequency range	MHz	47-862 (VHF-UHF)	
Multiplexes	-	2 adjacent COFDM	2 adjacent QAM
Channel bandwidth	MHz	6/7/8	6/8
Modulation	-	QPSK, 16-QAM, 64-QAM	6 MHz: 64-QAM 8 MHz: 64-QAM/256-QAM
Output bitrate/Mux	Mbps	up to 31,7	up to 51,3
OFDM mode	-	2K	-
Forward Error Correction (FEC)	-	1/2, 2/3, 3/4, 5/6, 7/8	-
Guard interval	-	1/4, 1/8, 1/16, 1/32	-
Modulation Error Rate (MER)	dB	40	
Spectral inversion	-	yes	
Output level	dBpV	68 to 83 (adjustable)	
Capacity	-	4 programs	

General

Connectors	-	Video input: 4 x CINCH Audio input: 4 x 3,5 mm jack RF: 2 x "F" connector female Management: RJ-45 (Ethernet) DC: banana sockets	
Power supply	VDC	15	
Consumption	A	0,8	
Operating temperature	°C	0 to +40	
Dimensions	-	5 RU x 8 TE x 195 mm	

Digital Modular Headends

5230 ProStreamer AV → IPTV 4

ProStreamer AV to IP module (CVBS to IPTV) with 4 Stereo Audio-Video inputs and 4 services.

- 4 AV stereo inputs per module
- easy configuration with built-in webserver
- change important parameters: resolution, brightness, contrast, hue, saturation,...
- ideal solution for CCTV or near-VOD!

5230



5230

Input:		
Number of inputs	-	4 x AV (CVBS)
Video processing	-	Conformance with IEC 13818-2 (MPEG2 video) and ISO/IEC 11172-3 (MPEG1 audio) standards
Video resolution	-	SIF: 352 x 288 SVCD: 480 x 576 HALF D1: 352 x 576 D1: 720 x 576 544: 544 x 576
Video bitrate	kbps	1500 to 7000 (Typ. 6000)
Audio volume	dB	-6 to +6 (Typ. 0)
Output:		
Standard	-	IEEE 802.3 10/100 Base-T
Protocol	-	Multicast IP/UDP
Bitrate	Mbps	100
Capacity	-	4 streams
General		
Connectors	-	Video input: 4 x CINCH Audio input: 4 x 3,5 mm jack Streaming: 1 x RJ-45 (Ethernet) Management: 1 x RJ-45 (Ethernet) DC: banana sockets
Power supply	VDC	15
Consumption	A	0,65
Operating temperature	°C	0 to +40
Dimensions	-	5 RU x 8 TE x 195 mm

Digital Modular Headends

5240 ProStreamer SD/HD Encoder

ProStreamer SD/HD Encoder with 8 Stereo Audio-Video inputs and 1 HD-SDI input / 9 services. The SD/HD Encoder is a digital headend encoder. It has 8 AV (CVBS) & 1 HD (HD-SDI) inputs. It provides 1 Ethernet IP streaming port and 1 Ethernet management port for system control & GUI.

5240

- 8 AV CVBS inputs with stereo or dual-mono audio
- 1 HD-SDI input with up to 4 embedded stereo or dual-mono audio channels
- easy configuration with built-in webserver
- change important parameters: resolution, brightness, contrast, hue, saturation,...
- ideal solution for CCTV or near-VOD!



5240

Input: CVBS (A/V)

Number of inputs	-	8 x AV (CVBS)
Video compression	-	MPEG-2 MP@ML H.264 AVC MP@L3.0 Selectable in groups of 4
Video resolution	-	PAL: 720x576i@25 NTSC: 720x480i@29.97
Video encoding bitrate	Mbps	1 to 10 (step = 100 kbps)
Audio compression	-	MPEG-1 layer II (MP2)
Audio sampling	kbps	32, 44.1, 48 (16 bit sampling)
Audio encoding bitrate	dB	64 up to 384

Input: HD-SDI (A/V)

Number of inputs	-	1 x AV (HD-SDI)
Video compression	-	H.264 AVC HP@L4.1
Video resolution	-	1920x1080i@25/29.97 1280x720p@50/59.94 Auto-detection
Video encoding bitrate	Mbps	3 to 20 (step = 100 kbps)
Audio compression	-	AAC
Audio sampling	kbps	48 (16 bit sampling)
Audio encoding bitrate	dB	AAC-LC : 64 up to 384 HE-AAC : 32 up to 288

Output:

Standard	-	Ethernet 100 / 1000 Base-T
Protocol	-	ARP, ICMP, DHCP
Bitrate	GbE	1
Capacity	-	9 streams

General

Connectors	-	Front side: HD-SDI Input: BNC Streaming : 1 x RJ-45 (Ethernet) Management : 1 x RJ-45 (Ethernet) DC: Banana sockets Rear side: CVBS SD Video Input : 8x RCA Yellow SD Audio (R) Input : 8x RCA Red SD Audio (L) Input: 8x RCA White
Power supply	VDC	15
Consumption	A	1.2
Operating temperature	°C	0 to +40 (Fan unit mandatory)
Dimensions	-	5 RU x 8 TE x 330 mm

Digital Modular Headends

5050W - 5051W Power Supply Unit

5050W

- input: 90 to 264 VAC
- output: 15VDC / 10A

5050W		
Input voltage	VAC	90 to 264
Output voltage	VDC	15
Output power	W	150
Dimensions	-	5RU x 12TE x 180 mm



5051W

- input: 90 to 264 VAC
- output: 15VDC / 20A
- suitable for redundancy

5051W		
Input voltage	VAC	90 to 264
Output voltage	VDC	15
Output power	W	300
Dimensions	-	5RU x 12TE x 333 mm



Digital Modular Headends

5062W - 5065W - 5066W Fan Unit, Sub-Rack, Mini rack with integrated fan unit

5062W

- fan Unit for DMH products (mountable in 19" rack)
- C-Type power cord (European plug)



5062W		
Input voltage	VAC	90 to 264
Power consumption	VA	35
Weight	kg	4,9
Dimensions	-	19" x 2 RU x 155mm

5065W

- 1 power supply and up to 9 modules can be inserted (not delivered with sub-rack)
- delivered with 8 blank plates mounted



5065W		
Number of slots	-	Up to 9 modules (+ 1 power supply unit)
Blank plates	-	8 blank plates mounted
Weight	kg	4,5
Dimensions	-	19" x 5 RU x 367mm

NEW

5066W I Mini rack with integrated fan unit *

- ideal for small projects
- compact housing with integrated fan unit
- wall mountable rack for up to 4 modules



5066W*		
Number of slots	-	Up to 4 modules (+ 1 power supply unit)
Blank plates	-	3 blank plates mounted

*Modules not included

Compact Headends

- ▶ Without a doubt, Johansson has a nice offering of (Digital) Compact Headends. This versatile range consists of A/V, satellite, cable, terrestrial, HDMI and SAT>IP solutions.

Do you need qualitative and stable equipment for a small, medium-sized or big hospitality project? Well, Johansson is your best option. Because you'll be surprised how our (Digital) Compact Headends will make your project more successful!



INDEX

COMPACT HEADENDS

8700	Titanium 4	20	
8701	Titanium 8	20	
8703	Titanium 8x8	20	NEW
8180	AV Modulator	22	NEW
5600	Universe Pro 3	22	
8600	Universe	21	
8201	HDMI Modulator	23	
8202	HDMI Modulator	23	
8203	HDMI Modulator	23	NEW
8210	HDMI Streamer	24	NEW
9830	SAT>IP Multiswitch	25	
5400	SAT>IP Multi Tuner SMATV Server	25	

Compact Headends

8700 - 8701 - 8703 Titanium



Compact headend with 4/8 tuners, 4/8 output MUXs (DVB-T/C) and 2/4 CI slots.

Titanium is our newest compact headend solution that is suitable for small to medium-sized budget-friendly projects.

The transmodulator with 4/8 tuners allows for very fast installation.

8700 | 8701 | 8703

- standalone frame with built-in power supply
- 8700: 4 tuners, 2 CAM, 4 MUX
- 8701: 8 tuners, 2 CAM, 4 MUX
- 8703: 8 tuners, 4 CAM, 8 MUX



NEW

		8700		8701		8703
Input						
Inputs	-	4 satellite bands 1 x RF in		4 satellite bands 1 x RF in		4 satellite bands 1 x RF in
Tuners	-	4 tuners (4 transponders)		8 tuners (8 transponders)		8 tuners (8 transponders)
Frequency range	MHz	950 - 2150		950 - 2150		950 - 2150
Level	dBµV	44 to 84		44 to 84		44 to 84
Bandwidth	MHz	36		36		36
Modulation	-	DVB-S2: QPSK, 8PSK / DVB-S: QPSK		DVB-S2: QPSK, 8PSK / DVB-S: QPSK		DVB-S2: QPSK, 8PSK / DVB-S: QPSK
DC remote power at RF input	-	13 V/18 V/22 kHz		13 V/18 V/22 kHz		13 V/18 V/22 kHz
Integrated multiswitch	-	Yes, allows flexible routing of satellite programs to multiplexes (QAM or COFDM)		Yes, allows flexible routing of satellite programs to multiplexes (QAM or COFDM)		Yes, allows flexible routing of satellite programs to multiplexes (QAM or COFDM)
Configuration	-	Built-in webserver accessible via management port		Built-in webserver accessible via management port		Built-in webserver accessible via management port
Encoded programs	-	From all 4 tuners. Can be routed through 1 or 2 CAMs and can be decoded using multi-service CAMs		From all 8 tuners. Can be routed through 1 or 2 CAMs and can be decoded using multi-service CAMs		From all 8 tuners. Can be routed through 1, 2, 3 or 4 CAMs and can be decoded using multi-service CAMs
Output						
Outputs	-	1 with 4 MUXs (DVB-T or DVB-C) + 1 loop-through		1 with 4 MUXs (DVB-T or DVB-C) + 1 loop-through		1 with 8 MUXs (DVB-T or DVB-C) + 1 loop-through
DVB-T output	Mbps	Up to 31.7 / MUX		Up to 31.7 / MUX		Up to 31.7 / MUX
DVB-C output	Mbps	Up to 51.3 / MUX		Up to 51.3 / MUX		Up to 51.3 / MUX
General						
Power consumption	W	22 (excl. external LNBs)		22 (excl. external LNBs)		22 (excl. external LNBs)
Dimensions	mm	345 x 70 x 182		345 x 70 x 182		345 x 70 x 182
Operating temperature	°C	0 to +50		0 to +50		0 to +50

Compact Headends

8600 Universe



This Universal Compact Headend enables you to receive any transponder from satellite, terrestrial or cable and put it on your coaxial and IP network.

- receives 1 transponder from any DVB source (satellite, terrestrial or cable)
- decrypts the PayTV channels, when a professional CAM is inserted
- puts the demodulated transponder on your private coaxial and IP network
- can work standalone to insert channels in your existing network
- more products can be combined to make a complete headend:
 - cascable inputs and outputs
 - remote powering capabilities
- compatible with SD and HD, with MPEG2 and MPEG4
- perfect picture quality thanks to a MER, comparable to premium headend equipment
- Plug&Play thanks to a built-in WebGUI



Compact Headends

8600

Input:

Number of inputs	-	1 with passive loop-through (-2dB)
Tuner	-	1
Frequency range	MHz	42 - 2150
Input level	dBμV	44 to 89
Standard	-	DVB-S/S2 DVB-T/T2 DVB-C
DC remote power for LNB or LNA	V mA	0/13/18/22kHz/DiSEqC, EN50494, EN50607 350

Output: RF

Number of outputs	-	1 RF with passive loop-through (-2 dB)
Multiplex	-	1
Frequency range	MHz	174 - 862
Output level	dBμV	57 to 102 (adjustable)
Standard	-	DVB-T ISDB-T
Modulation error rate (MER)	dB	40

Output: Ethernet

Number of outputs	-	1 GB Ethernet
Standard	-	IEEE 802.3ab 10/100/1000 Base-T
Protocol	-	Multicast IP / UDP

General

CI slot	-	1
Input voltage	VDC	12 - 20
Power consumption	W	7 (without CAM and without remote power)
DC jack	mm	Ø 2.1
Powering remote units	-	Yes, 1 unit can power other units
Operating temperature	°C	0 to +50
Dimensions	mm	222 x 142 x 50
Weight	kg	1.1
Accessories	-	15V power adapter, 1 Ethernet cable

Compact Headends

5600 Universe Pro 3

This rackmountable Universal Compact Headend enables you to receive any transponder from satellite, terrestrial or cable and put it on your coaxial and IP network.

- receives 3 transponders from any DVB source (satellite, terrestrial or cable)
- decrypts the PayTV channels, when one or more professional CAMs are inserted
- puts the demodulated transponders on your private coaxial and IP network
- can work standalone to insert channels in your existing network
- compatible with SD and HD, with MPEG2 and MPEG4
- supports LCN
- perfect picture quality thanks to a MER, comparable to premium headend equipment
- Plug&Play thanks to a built-in WebGUI



8180 AV Modulator

The compact 8 channel analog modulator upconverts 8 analog CVBS signals (composite video baseband signal) independently to VHF or UHF channels. It is designed for systems that have not yet switched to DVB-T

- 8 analog inputs (each 1 video cinch + 2 audio cinch (L & R))
- processes up to 8 analog channels (PAL, SECAM, NTSC)
- 1 RF bypass + 1 RF output
- easy to configure with the Johansson button and 4 digits display
- selectable Region, Standard, Mode, Output Channel
- adjustable RF Level, Audio Level and Video Level
- very compact housing with detachable power supply
- low power consumption



Compact Headends

8201 - 8202 - 8203 HDMI Modulator



HDMI to multi-standard modulator with 1 HDMI input and 1 RF input - output.
Convert your local HDMI signal into an RF signal, ready for distribution over coaxial cables.
Our HDMI modulators are suitable for 24/7 usage, which makes them one of the most reliable HDMI modulators on the market.

8201 | 8202 | 8203



- 1 HDMI input, capable of receiving all resolutions up to 1080p60
- 1 RF input, to by-pass terrestrial or cable signals
- 1 RF output
- perfect picture thanks to a MER comparable to other premium headend equipment
- easy to use menu structure, in combination with the Johansson rotary/push button
- optimized for cascading multiple modulators on your coaxial network
- smallest housing in its range

Compact Headends

NEW

8201 | 8202 | 8203

Input: HDMI

Video resolution	-	576i up to 1080p
Video encoding	-	H264 / AVC
Audio encoding	-	MPEG 1 Layer II / AAC
Connector type	-	HDMI type A

Input: RF

Frequency	MHz	5 - 1218
Loss to RF output	dB	2

Output: RF (RF input signal + HDMI modulated transponder)

Modulated channel frequency	MHz	174 - 1218	174 - 790
Output level	dBμV	59 - 99 (adjustable)	47 - 79 (adjustable)
MER	dB	Typ. 38	

Output: Settings

		8202+8201	8202	8202	8202	8202	8201	8203
Output type	-	DVB-T	DVB-C	ATSC-T	ATSC-C	DTMB	ISDB-T	DVB-T
Bitrate	Mbps	2 - 23		2 - 15		2 - 23		
Channel bandwidth	MHz	6, 7 or 8	2 to 8	6	6	8	6	6, 7 or 8
Constellation	-	COFDM (QPSK / 16QAM / 64 QAM)	16 QAM 32 QAM 64 QAM 128 QAM 256 QAM	8VSB	64 QAM 256 QAM	QPSK QAM-4NR 16QAM 32QAM 64QAM	COFDM (QPSK / 16QAM / 64 QAM)	COFDM (QPSK / 16QAM / 64 QAM)
Other settings	-	Code rate Guard Interval 2K - 8K	-	-	-	Interleave Code rate 2K - 8K Sync frame PN phase	Code rate Guard Interval 2K - 8K	Code rate Guard Interval 2K - 8K

Configuration

Basic configuration	-	Country Output type Output frequency Output level LCN Channel Name
Advanced configuration	-	RF Video & Audio SID PMT, VPID, APID, NIT, ONID PDS TS ID

Power & Dimensions, Etc...

Power	-	Input Voltage: 12 VDC Consumption: 5W Typ. (6W max.) Jack Ø 2.1 mm
Dimensions, weight	-	155 x 120 x 60 mm 0.6 kg
Accessories	-	12V power adapter

Compact Headends

NEW

8210 HLS Streamer

The Johansson HLS Streamer is designed for small to medium-sized projects. It puts an HDMI video signal on your local network. This gives the end-user the flexibility to see real-time video content on their preferred (mobile) device: smartphone, tablet, laptop or TV.

- puts an HDMI video signal on your local network (optimized for Wi-Fi)
- HDMI loop-through for monitoring on a local TV
- does not stress the residential internet connection
- high output video quality
- the bitrate can easily be changed in the configuration interface
- simply surf to the dedicated webpage
- no need to install a mobile application or additional software



NEW

8210

Number of inputs	-	1 x HDMI
Outputs	-	1x IP Ethernet RJ-45 jack (for streaming+WebGUI) 1 x HDMI (loop-through)
HDMI input	-	Video resolution : 576i up to 1080p Video encoding : H264/AVC Video bitrate Encoding: from 1 Mbps to 30Mbps Audio encoding : AAC/MPEG2 Audio bitrate Encoding 32 -192 Kbps
Streaming port	Mbps	10/100
Ethernet OTT encapsulation	-	HLS (Apple HTTP Live Streaming) (unicast)
Ethernet multicasting	-	Possible to output UDP multicast (requires external IGMP snooping equipment)
Simultaneous users	-	Up to 50 (depending on the bitrate and the network infrastructure)
Input resolution	-	Up to 1080p60
Supported playback	-	All HTML 5 browsers on Android/iPhone/Mac/PC/SmartTV/... No need to install mobile application or additional software
Configuration	-	Network/login/input encoder settings/output multicast settings
Power consumption	W	5
Operating temperature	°C	0 to +50 (for indoor use only)
Dimensions	mm	155 x 120 x 60 mm
Weight	kg	0.6

Compact Headends

5400 - 9830 Sat>IP Multi Tuner SMATV Server

SAT>IP™ is a revolutionary technology for the cost-effective distribution of satellite signals via in-home or private IP networks. The rack mountable **SAT>IP™** Multi Tuner SMATV server supports both dynamic and static operation; a combination of these modes is also possible.

In static mode the rack mountable **SAT>IP™** Multi Tuner SMATV server can receive signals from 4 satellite bands and multicast up to 32 channels on your private IP network to a large amount of clients. In dynamic mode 32 clients can simultaneously watch every channel which is available on the 4 satellite bands.

Compact
Headends

5400



- approved by the SAT>IP Alliance
- 4 LNB inputs for Quattro or Quad LNB. If the LNB is not already powered use the 9930 for Quattro and Quad LNB
- 4 trunk outputs for cascading multiple server units
- support both static and dynamic operation
- streams satellite TV (SD and HD) and radio over IP
- configuration with built-in webserver

Unitron is a proud member of the **SAT>IP™** Alliance.

SAT>IP™ enables you to watch satellite TV on your smart phone, tablets, PC and also your standard TV as well as smart TV. **SAT>IP™** is a revolutionary technology for the cost-effective distribution of satellite signals via in-home or private IP networks.

This **SAT>IP™** enabled multiswitch is the perfect solution to provide TV signals over **Ethernet** or **WiFi**. All channels available over satellite can be followed on hand-held devices, smartphones and tablets, using the **SAT>IP™** app for Android an iOS.

The **SAT>IP™ multiswitch** can be powered by Power over Ethernet (PoE), making an external power supply or adapter superfluous. In case the routers or switches in the building are not yet PoE-enabled, an optional PoE power supply can be delivered to power the unit.

This scalable multiswitch system can receive signals from 4 satellite bands and can distribute up to 16 IP streams through 2 Gigabit Ethernet ports. **This means 8 users per household can independently watch TV!**

9830



- approved by the SAT>IP Alliance
- 4 LNB inputs for Quattro or Quad LNB
- 4 Trunk outputs for cascading with any type of Multiswitch, as well in new or existing installations
- 2 IP outputs, each supporting up to 8 independent users on a gigabit network
- streams satellite TV (SD and HD) and radio over IP

Digital SCR Solutions

- Multiswitches are a key element in the distribution of satellite signals over coaxial cable throughout big buildings. In many cases there is only one coax cable available from the technical riser to the apartment.

Unitron offers a wide range of multiswitches with integrated 'Digital SCR' technology. With those multiswitches, you can connect multiple set-top boxes for multi-room applications to numerous satellites using one coax cable only!

By enabling Single Cable Router mode in Unitron's "Johansson SCR multiswitch", we simplify the deployment and lower the overall cost of satellite service installation.

Over the last years, Johansson Multiswitches have been **sold in over 40 countries**. This has made Unitron market leader in dSCR technology. To meet your unique system requirements, custom software solutions are available.



Johansson is your dSCR market leader and offers you **the biggest digital SCR range**

INDEX

DIGITAL SCR SOLUTIONS

9721	Digital SCR LNB	28	
9725	SFU dCSS Switch	29	NEW
9729	Digital SCR programmer	28	
9731	1-way dSCR Multiswitch	30	
9732	2-way dSCR Multiswitch	30	
9733	1-way dSCR Multiswitch with passive terrestrial diplexer	31	
9734	2-way dSCR Multiswitch with passive terrestrial diplexer	31	
9735	1-way dSCR multiswitch	31	NEW
9738	SCR Stacker	32	
9739	dSCR Multiswitch add-on	33	
9744	4-way dSCR Multiswitch	34	
9746	8-way dSCR Multiswitch	34	
9748	16-way dSCR Multiswitch	34	
9754(A)	4-way dSCR Multiswitch	35	NEW
9758(A)	8-way dSCR Multiswitch	35	NEW
9774	4-way dSCR Multiswitch - wideband compatible - Auto standard	36	NEW
9775	6-way dSCR Multiswitch - wideband compatible	36	
9780	Compact Satellite Converter	37	NEW
4603	Smart Splitter	40	
9645KIT	Stacker Destacker	38	
2460(UK)	Power Supply for dSCR	39	
2461	Power Supply	40	
2462(UK)	Power Supply for dSCR	39	
9933(UK)	DC Power Supply	39	
9669	Power Inserter	41	
9930(UK)	Power Inserter	42	
9935	Satellite IF Amplifier	43	
9654	Twin Amplifier for Wideband	43	
993x	Satellite Splitters and Taps	44	
99xx	Legacy Multiswitches	45	
449x	Passive Splitters	45	

SAT Distribution
(SCR & Legacy)

Digital SCR Solutions

9721 dSCR LNB

The SCR technology has widely expanded the capabilities of satellite multiswitches. Since this technology is a great success in our products and on the market, it was the perfect time for Unitron to take the next step: putting the SCR technology into LNBs.

9721

- LNB, able to receive 1 Ku satellite orbital slot
- connect up to 24 or 32 users
- high output power (AGC controlled)
- low noise
- multistandard support: EN50494 / EN50607. Other standards, like FSK, on request
- setup in static or dynamic mode
- available for different operator user bands



9721

Input	-	1 Ku
Input frequency	MHz	10700 – 12750
Outputs	-	1
Output SCR channels	-	24 - 32
Chipset	-	MaxLinear
Supported standards	-	EN50494 / EN50607
Conversion gain	dB	60
Noise figure	dB	Typ. 0.5
Cross polarization isolation	dB	25
Output channel power	dBμV	81 (AGC)
Return loss	dB	≥8
DC supply voltage	VDC	9 - 20
Power consumption	W	4.8 max.
Operating temperature	°C	-40 to +60
LNB mount fitting	Ø mm	40
Dimensions	mm	135 x 120 x 60

9729 dSCR Programmer

NEW

Buying a new LNB because its channel plan has changed is now something of the past. With the dSCR Programmer, you can upgrade your LNB without having to climb on your roof to the satellite dish. Just connect the dSCR Programmer indoors to the coaxial cable coming from the LNB.

9729

Easy-to-use programmer for digital SCR devices
(Such as the Johansson Digital LNB (REF.9721))

- make a configuration file using the online platform uCloud and save the file to a SD card
- power the dSCR Programmer with 18Vdc (with F-connector or DC-jack)
- insert the SD card with the configuration file
- connect the Programmer to a dSCR device (e.g. Digital LNB)
- tap the button on the dSCR Programmer for 2 seconds to update the dSCR device



Digital SCR Solutions

NEW

9725 SFU dCSS Switch

Upgrade to Sky Q without changing your existing quadplex wall socket. The 9725 SFU dCSS Switch converts a wideband signal to dCSS so you can connect any digital Set-Top box – such as Sky Q, Sky+, FreeSat or Freeview – without changing your in-home wall socket.

9725

- Designed for Pre-Wired dwellings with Wideband LNBs and Terrestrial and Radio antennas
- 3 inputs: 2 Satellite cables (Wideband LNB) + 1 Terrestrial cable
- 2 outputs with 16 user bands each
- multistandard: EN50494 – EN50607 – SKY – Legacy – Terr.
- supporting New Build Developers and also for Retro-Fitting
- makes all digital platforms available to residents
- upgrade to Sky Q without changing your existing quadplex wall socket
- for indoor use and outdoor use

SKY
COMPATIBLE



SAT Distribution
(SCR & Legacy)

NEW

9725

Inputs	-	2 SAT + 1 Terr./FM/DAB
Outputs	-	2 (Terr. + Legacy + SCR)
Input frequency	MHz	Terr.: 5-862 SAT (wideband): 290-2340
Output Frequency	MHz	5-862 + 950-2150
Input/output connector	-	75 Ohm F type (Female)
dCSS/dSCR UBs	-	16+16
dCSS/dSCR output level	dBμV	85
Return loss	dB	>8 (Typ 12)
Satellite loss	-	Not applicable, AGC (automatic gain control)
Terrestrial/Cable loss	dB	-4
Band and polarity selection	-	Universal LNB voltage & Tone DiSEqC 1.0 (unidirectional) DiSEqC 2.0 (bidirectional) Standard EN 50494 (SCD) Standard EN 50607 (SCD 2) SKY UK standard
Power consumption	W	< 3
Max DC current consumption	-	< 230mA @ 13 Volt
Powering	-	From STB - To LNB
Operating temperature	°C	-20 to +50
Dimensions indoor unit	mm	65 x 100 x 30
Dimensions outdoor unit	mm	120 x 115 x 50

Digital SCR Solutions


9731 - 9732 Multiswitch



Unitron offers a wide range of multiswitches with integrated 'SCR' technology. With those multiswitches, you can connect multiple set-top boxes for multi-room applications to numerous satellites using one coaxial cable only!

- up to 16 UBs per SCR Output
- supports all SCR standards
- ultra compact housing
- trunk output for cascading multiple products
- available for different operator user bands

9731 | 9732

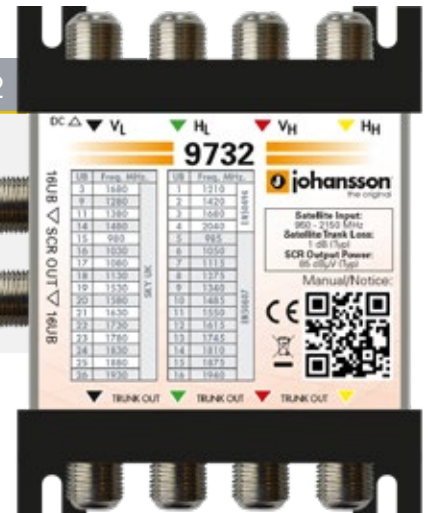

		9731	9732
Trunk inputs	-	4	
Trunk outputs	-	4	
Frequency	MHz	950 - 2150	
Trunk loss	dB	3	
dCSS/dSCR outputs	-	1	2
dCSS/dSCR output connector	-	75 Ohm F type (Female)	
dCSS/dSCR UBs	-	16	16 + 16
dCSS/dSCR output level	dBμV	85	
Return loss	dB	>=8 (typ 12)	
Tap loss	-	Not applicable, AGC (automatic Gain control)	
Band and polarity selection	-	DiSEqC 1.0 (unidirectional) DiSEqC 2.0 (bidirectional) Standard EN 50494 (SCD) Standard EN 50607 (SCD2) SKY UK standard	
Max DC current consumption	mA	<300 @13Volt	<320 @13Volt
Power supply	-	From STB, power inserter or trunk (VL)	
Power inserter (2460 + 9669 available separately)	-	3A, 20V	
Dimensions	mm	90 x 80 x 40	

Variants for digital SCR multiswitches are possible

Custom software solutions are available to meet your unique system requirements.

Variants can be made on request.


Digital SCR Solutions

9733 - 9734 - 9735 Multiswitch

The 9733/ 9734 has 4 satellite wideband input (for 1 quattro or 2 wideband LNB), passive terrestrial diplexer, 2 outputs with each 16 user bands.

9733 | 9734

- input for 1 universal LNB or 2 wideband LNBs (switchable)
- up to 16 UBs per SCR output
- auto detection for SCR and Legacy Mode
- possibility to convert wideband inputs into Legacy outputs
- support all SCR Standards
- compatible with all Legacy STBs
- passive terrestrial/cable diplexer
- low power Sleep Mode
- ultra compact housing
- trunk output for cascading multiple products
- available for different operator user bands
- see page 51 for application scheme

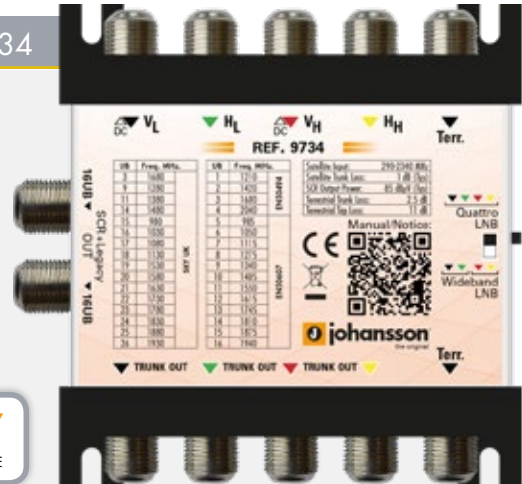

SAT Distribution
(SCR & Legacy)

The 9735 has 1 dSCR output with 4 user bands.

9735

- input for 1 universal LNB or 2 wideband LNBs (switchable)
- up to 4 UBs per SCR output
- auto detection for SCR and Legacy Mode
- support the following standards: EN50494 and EN50607
- compatible with all Legacy STBs
- passive terrestrial/cable diplexer
- ultra compact housing
- trunk output for cascading multiple products
- available for different operator user bands



		NEW		
		9733	9734	9735
Trunk inputs	-	4 + 1		
Trunk outputs	-	4 + 1		
Frequency	MHz	5 - 862 / 290 - 2340		
Trunk loss	dB	1		
dCSS/dSCR outputs	-	1	2	1
dCSS/dSCR output connector	-	75 Ohm F type (Female)		
dCSS/dSCR UBs	-	16	16 + 16	4
dCSS/dSCR output level	dBμV	85		
Return loss	dB	>=8 (typ 12)		
Tap loss	-	Not applicable, AGC (automatic Gain control)		
Band and polarity selection	-	Universal LNB voltage & Tone I DiSEqC 1.0 (unidirectional) I DiSEqC 2.0 (bidirectional) I Standard EN50494 (SCD) I EN50607 (SCD2) I SKY UK standard		Universal LNB voltage & Tone I DiSEqC 1.0 (unidirectional) I DiSEqC 2.0 (bidirectional) I Standard EN50494 (SCD) I EN50607 (SCD2)
Max DC current consumption	-	<350mA @13Volt		<140mA @13Volt (2W)
Power supply	-	From STB, power inserter or trunk (VL&VH)		
Power inserter (2460 + 9669 available separately)	-	3A max, 20V		
Dimensions	mm	92 x 90 x 40		70 x 90 x 40

Digital SCR Solutions

9738 SCR Stacker

The SCR Stacker is the perfect solution to upgrade an old single satellite STB system to an SCR-compatible dual input receiver (PVR) or 2 separate SCR-compatible set-top boxes. The advantage of using the 9738 is that no additional cable is needed to connect the second tuner. The product stacks both transponders on 1 cable.

- use with Universal LNBs (f.i. 2 single LNBs or 2 ports of a quad LNB) or 2 ports of a multiswitch
- powers the LNB or multiswitch from the STB or from an additional power supply
- supports the following standards:
 - EN50494/SCR standard (DiSEqC 1.0)
 - EN50607/dCSS/dSCR standard (DiSEqC 2.0)



9738		
Inputs	-	2 ports Satellite, combined with Terrestrial on port 1
Input frequency	MHz	Userbands 1-2: 1076 - 1178 MHz or Userbands 3-4: 1280 - 1382 MHz or Userbands 5-6: 1284 - 1400 MHz or Userbands 7-8: 1210 - 1420 MHz
STB output frequency	MHz	5 - 862 / 950 - 2150
dCSS/dSCR outputs	-	1 SCR
dCSS/dSCR output connector	Ohm	75 F type (Female)
dCSS/dSCR UBs	-	2 on SCR output
dCSS/dSCR output level	dBμV	86
Satellite input power level	dBμV	64 to 94
Return loss	dB	>=8 (typ 12)
Tap loss	-	Not applicable, AGC (automatic Gain control)
Band and polarity selection	-	DiSEqC 1.0 (unidirectional) DiSEqC 2.0 (bidirectional) Standard EN 50494 (SCD) Standard EN 50607 (SCD2)
Max DC current consumption SCR port	W	<4,0
DC power pass from STB to input ports	V	13/18/22kHz 100mA max per port
From DC power port to input ports	V	13/18/22kHz 500mA max combined
Power supply	-	From STB or power inserter
Power (2460 available separately)	mA	500 max, 20V
Dimensions	mm	90 x 85 x 40

Variants for digital SCR multiswitches are possible

Custom software solutions are available to meet your unique system requirements.

Variants can be made on request.

Digital SCR Solutions

9739 Multiswitch Add-on

The 9739 can be used with Quattro or Quad LNB types and will output in Legacy or SCR mode. Use the Multiswitch Add-on to change a legacy Multiswitch to a Channel Stacking Switch (CSS) without loss of existing legacy ports. Concretely, you can use the Multiswitch Add-on to upgrade your legacy Multiswitch system and make the latest generation of SCR set-top boxes (STB) available in 2 Single Family Units (SFUs) per Add-on. You can also use this Multiswitch Add-on to transform a Fiber GTU signal to a SCR GTU signal.

- no need to interrupt the trunk signal during installation.
- make a legacy system compatible with two times 16 user bands
- supports the following standards:
 - EN50494/SCR standard (DiSEqC 1.0)
 - EN50607/dCSS/dSCR standard (DiSEqC 2.0)
 - Simultaneous support for EN50494/EN50607 standards
 - SKY UK standard



SAT Distribution
(SCR & Legacy)

9739

Inputs	-	4 ports Terrestrial + Satellite
Input frequency	MHz	5 – 862 / 950 – 2150
STB output frequency	MHz	5 - 862 / 950 - 2150
dCSS/dSCR outputs	-	2 legacy only 2 SCR/legacy (auto detection)
dCSS/dSCR output connector	Ohm	75 F type (Female)
dCSS/dSCR UBs	-	16 per SCR output
dCSS/dSCR output level	dBμV	88
Satellite input power level	dBμV	64 to 94
Return loss	dB	>=8 (typ 12)
Tap loss	dB	SCR: Not applicable, AGC (automatic Gain control) Legacy: 0 typical
Terrestrial/Cable loss	dB	-7 typical
Band and polarity selection	-	DiSEqC 1.0 (unidirectional), DiSEqC 2.0 (bidirectional) Standard EN 50494 (SCD), Standard EN 50607 (SCD2)
Max DC current consumption	W	SCR/Legacy ports: <4,2 Legacy ports only: <2
DC power pass from STB to input ports	V	13/18/22kHz 100mA max per port
From DC power port to input ports	V	13/18/22kHz 100mA max per port 1A max to HL port
Power supply	-	From STB or power inserter
Power (2460 available separately)	mA	300 max, 20V
Dimensions	mm	90 x 85 x 40

Digital SCR Solutions

9744 - 9746 - 9748 dSCR Multiswitch




The 974x products are designed to support a wide range of new and existing multiswitch installations. Have a mixed network of STBs, not a problem with the Johansson SCR family of multiswitches. Auto detection of what type of STB is on the network, is built-in to all our solutions.

9744 | 9746 | 9748

- 4/8/16 SCR outputs
- up to 16 UBs per SCR output
- auto detection for SCR and Legacy Mode
- support all SCR Standards / compatible with all Legacy STBs
- amplified/bypass terrestrial diplexer
- soft power-up mode for Legacy
- power diagnostics for trunk power
- available for different operator user bands

SKY
APPROVED

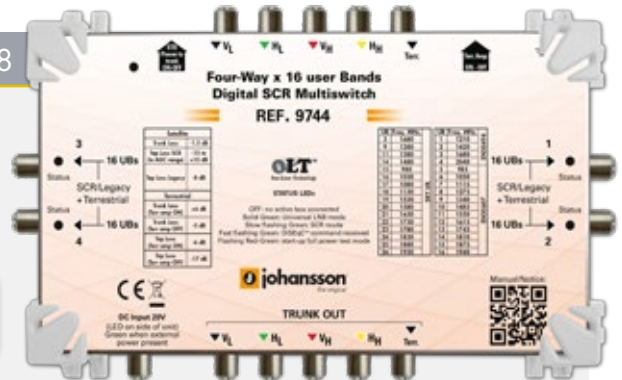

			9744	I	9746	I	9748
SATELLITE	Operating frequency range	MHz	950 - 2150				
	Inputs	-	4				
	Outputs* (Trunk)	-	4				
	Max. and min. input txp power level	dBµV	74 to 104				
	Trunk lines In to Out	dB	-2.5 max (-1.5 typical)		-4 max. (-2.5 typical)		-9 max. (-6 typical)
	In to SCR Out gain	dB	-15 to +15 typical, AGC controlled				
	In to legacy Out gain	dB	-13 max. (-8 typical)				
	Return loss	dB	>8				
TERRESTRIAL	Operating frequency range	MHz	88 - 790				
	Inputs	-	1				
	Outputs* (Trunk)	-	1				
	Max. input mux power level	dBµV	Amplified: 96		Amplified: 96		Amplified: 88
	Trunk lines In to Out	dB dB dB	Bypass: -7 max. (-5 typical) Amplified: +4 min. (+6 typical)		Bypass: -10 max. (-8 typical) Amplified: +1 min. (+3 typical)		Bypass: -20 max. (-16 typical) Amplified: +2 min. (+6 typical)
	In to SCR Out gain	dB dB dB	Bypass: -23 max. (-17 typical) Amplified: -12 max. (-6 typical)		Bypass: -27 max. (-21 typical) Amplified: -16 max. (-10 typical)		Bypass: -34 max. (-24 typical) Amplified: -16 max. (-10 typical)
dSCR OUTPUT PORTS	dSCR Output ports	-	4		8		16
	Supported output modes	-	SCR + Legacy + DTT/DAB/FM				
	SCR mode indication	-	Multicolor/Flashing LED				
	SCR Output power per txp	dBµV	86 min. (88 typical), AGC controlled				
	SCR Channel bandwidth	MHz	46				
	SCR User bands	-	16				
	SCR Standard (auto detect a switch)	-	SKY UK SCR, CENELEC EN50494, CENELEC EN50607, Universal LNB Tone & Voltage				
	Legacy Output power per txp	dBµV	Up to 94, no AGC				
DiSEqC signaling	-	DiSEqC compliant					
DC POWER	DC Power connector	-	Unit can be powered via PWR port, trunk lines or outputs (all F-type)				
	Power indication	-	Green LED (front of unit)				
	Power supply voltage	VDC	10 to 20		10 to 20		10 to 20 (from STB) 11 to 20 (from PWR port)
	Max. power consumption	W	SCR mode: 6 (per pair of ports) I LNB emulation mode: <2 (per port - Ter Amp OFF)				
	DC from trunk lines Out to In	-	Yes (not for terrestrial trunk)				
	Supply current to LNB (switchable)	mA	500 (@ 20V)				
	Short Circuit protection & Power on Diagnostics	-	Yes				
	Ground post	-	1				
	Operating temperature range	°C	-20 to +50 (indoor housing)				
Dimensions	mm	223 x 143 x 50		223 x 223 x 50		223 x 423 x 50	

Digital SCR Solutions

NEW

9754 - 9754A - 9758 - 9758A dSCR Multiswitch

We proudly present you the next generation dSCR Multiswitches from your market leader. These state-of-the-art dSCR Multiswitches in a compact die-cast housing are optimized for installation in narrow spaces and will make your installation more successful.

- 4 satellite + 1 terrestrial inputs
- multi-standard: wideband, dSCR, dCSS, legacy, terrestrial
- 4-way (9754 – 9754A)
- 8-way (9758 – 9758A)
- 9754A and 9758A: A-version with active terrestrial amplifier
- optimized performance and power consumption
- compact die-cast housing for easy installation

9754A

SKY
COMPATIBLE



SAT Distribution
(SCR & Legacy)

NEW

NEW

NEW

NEW

9754

9754A

9758

9758A

Trunk inputs/outputs	-	Sat.: 4 Terr.: 1			
dSCR outputs	-	4		8	
Frequency	MHz	Sat.: 290 - 2340 Terr.: 88 - 862			
Min input level SAT	dBµV	Universal LNB: 62 Wideband LNB:67			
Max input level TERR	dBµV	-	Amplified: 109 Bypass: 121	-	Amplified: 109 Bypass: 121
Trunk return loss	dB	>10			
Trunk insertion loss	dB	Sat.: 2 Terr.: 1.5			
Sat positions	-	Universal LNB: 1 Wideband LNB: 2			
dSCR channel output power	dBµV	88 (AGC controlled)			
Output return loss	dB	>10			
Terr tap loss	dB	18	Amplified: 8 Bypass: 20	22	Amplified: 12 Bypass: 24
SCR channels (16 users/output)	MHz	Between 950 and 2150			
Supported standards	-	EN50494 (SCD) EN50607 (SCD 2) BskyB Legacy			
Trunk termination DC blocked required	Ohm	75 (Sat & Terr)			
DC power via SAT trunks	V	20			
Consumption	W	10		20	
Operating temperature	°C	-20 to 50, indoor housing			
Dimensions	mm	124 x 117 x 39		204 x 117 x 39	

Variants for digital SCR multiswitches are possible

Custom software solutions are available to meet your unique system requirements.
Variants can be made on request.

Digital SCR Solutions


9774 - 9775 Multiswitch wideband compatible

The 9775 has 8 satellite wideband inputs and 1 terrestrial input. This allows you to use 2 quattro LNBS or 4 wideband LNBS. The 6 SCR outputs have 10 user bands each. What makes the 9775 unique is the following: on each individual output, you can select the input and channel plan. This multiplies the available content and minimizes your equipment costs.

With the 9775, you can offer a wide range of video content in multi-dwelling units. For each single family unit, you can select a specific channel plan. When the family's preferences change, or there's a new family moving in, you can simply change the output settings. This gives you much more flexibility and you only need one multiswitch.

- 8 satellite wideband inputs
 - compatible with 4 wideband LNBS
 - compatible with 2 Quattro LNBS
- 6 SCR outputs with each 10 user bands
- 1 terrestrial input
- channel plan can be selected on each output individually
- **ref. 9774:** variant with 4 SCR outputs with each 16 user bands and auto-detection for SKY standards

9774 | 9775

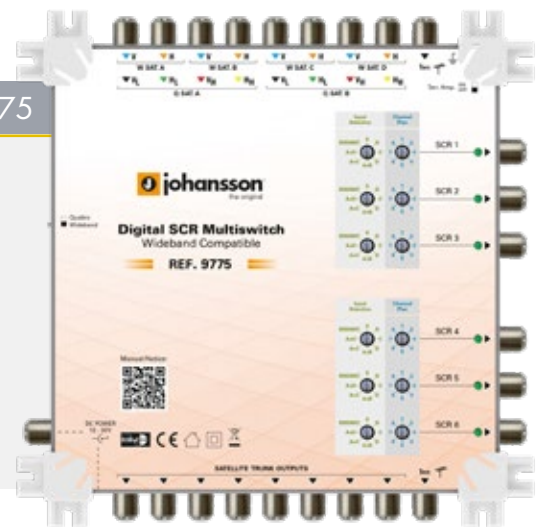

9775

Trunk inputs/outputs	-	Sat.: 8 Terr.: 1
dSCR outputs	-	6
Frequency	MHz	Sat.: 290 - 2340 Terr.: 88 - 862
Input level	dBμV dBμV	Sat: 58 to 108 Terr.: 100 (amplified)
Return loss	dB	-10
Insertion loss	dB	Sat.: 2 Terr.: 3
Sat positions	-	Wideband: 4 Universal: 2
Supported LNB types	-	quattro (LO: 9750/10600) Wideband (LO: 10410)
dSCR channel power	dBμV	86 (AGC controlled)
Output return loss	dB	10
Terr output loss	dB	-20 or -8 (switchable)
SCR channels (10 users/output)	MHz	Configurable between 950 and 2150
Supported standards	-	EN50494 / EN50607 / BskyB
Trunk termination DC blocked required	Ohm	75 (Sat & Terr)
DC supply to sat trunks from power adapter	V	20
DC supply from sat trunks	V	20
Max LNB current / LNB	mA	500
DC jack 2.1mm + F con DC input	V	20
DC power from output port	-	Yes
Consumption	W	24
Dimensions	mm	220 x 220 x 50
Operating temperature	°C	-20 to 50, indoor housing

Digital SCR Solutions

NEW

9780 Compact Satellite Converter

The 9780 is the new generation converter for satellite signals to be used in MDU's. The compact plug-and-play module has a straightforward and easy configuration. Perfect for equalizing and optimizing satellite transponders as input for your fiber headend.

- programmable satellite IF converter
- up to 32 DVB-S/S2 transponders
- 4 satellite inputs (Quattro/Quad/Wideband LNB)
- realtime AGC on all individual transponders
- read-out of input level strength: no need for field strength meter
- 112 dBμV (output level)
- auto-tuning functionality

9780



SAT Distribution
(SCR & Legacy)

NEW

9780

Inputs	-	4 SAT (wideband/quattro/quad)
Outputs	-	1 main (SAT) + 1 test port (-30dB)
Frequency range	MHz	Sat.: 290 - 2340
Input level	dBμV	40 - 95
SAT output power (per transponder)	dB	112
SAT output power (35dB/IM3)	dB	132
SAT output level flatness	dB	<1
SAT output level adjustment	dB	20
Slope adjustment	dB	15
SAT Gain	dB	>40
Number of transponders	-	32
Conversion	-	Yes (all 32 transponders)
Transponder Bandwidth	MHz	1 - 64 (per 1 MHz steps)
Selectivity	dB	35 (@ 1 MHz)
Return Loss	dB	10
Auto tuning	-	Yes (incoming transponders are copied from input 1 to output)
ESD protection	-	All inputs
DC@ SAT input	-	13V/18V/Bypass & 0/22kHz selectable by SW
DC Load current @ SAT input	mA	500
SD port	-	Yes (for copy configuration)
Operating temperature	°C	-5 to +50
Power Supply	V	100 - 240
Power Consumption	W	25
Dimensions	mm	217 x 165 x 59
Weight	kg	0,8

Digital SCR Solutions

9645 KIT Stacker - Destacker



The Stacker-Destacker is the perfect solution to upgrade an old single-cable system with a twin (or quad) LNB to be used in combination with a dual input receiver (PVR) or 2 separate single input receivers. The advantage of using the Stacker-Destacker is that you don't need an additional cable. The Stacker converts the frequencies of the second input, so it is literally stacked above the frequencies of the first input. The Destacker converts the frequencies back to the original ones.

This new version of the Stacker-Destacker doesn't need an additional power adapter by default. Thanks to the built-in attenuator with adjustment, it is protected against high input signals, avoiding saturation of the device.

- no power adapter needed! Power the device with the satellite receiver.
- built-in switchable attenuator to protect against high input signals
- Transparent for unidirectional DiSEqC® (receive signals from up to 4 satellites)
- wide band 5-2150 MHz to combine terrestrial signals (FM, DAB, TV)
- no additional coax cable needed between dish and receiver
- no need to replace the existing cable
- transparent system
- no degradation of picture
- HD compliant

9645 KIT



Stacker



Destacker

9645 KIT			
		Stacker	Destacker
Input	-	2	1
Input frequency	MHz	5-2150 MHz / 950-2150 MHz	5-3550 MHz with "F" High Quality connector
Output	-	1	2
Output	MHz	5-3550 MHz with "F" High Quality connector	5-2150 MHz / 950-2150 MHz
Insertion loss/gain	dB	-1 @ 5-862 MHz -3 @ 950-2150 MHz Converted Sat.Pos. 1 (0 dB)= +6 Converted Sat. Pos. 2 (10 dB att.)= +4	-1 @ 5-862 MHz -3 @ 950-2150 MHz Converted Sat.= +5
Max. Input level*	dBµV	pos. 1 (0 dB) = 88 Pos. 2 (10 dB att.) = 98	-
Consumption	W	160 max. Optional power adaptor available for more LNB current. Ø 2.1 mm **	
Dimensions	mm	125 x 115 x 45	150 x 90 x 40
General specification	-	Operating system up to 75 m CT100 or 17 VAIC coaxial cable	

* Sat.: -35 dBc/IM3

** Optional power adaptor only needed in extreme situations: ref. 2452 (24 Vdc)



Digital SCR Solutions

2460(UK) - 2462(UK) - 9933(UK) Power Supply

These power supplies are designed to power the trunk lines or the DC input connector.

2460(UK) | 2462(UK)


- DC power supply with F-connector
- powers SCR products without overloading the set-top boxes



		2460(UK)	I	2462(UK)
Input voltage	VAC	100 - 240		100 - 240
Output voltage	VDC	20		20
Output current	A	3,25		1,2
Output Connector	-	F-type		F-type
Dimensions	mm	115 x 55 x 35		90 x 90 x 35

9933(UK)

- DC Power Supply with DC-jack 2.1 mm

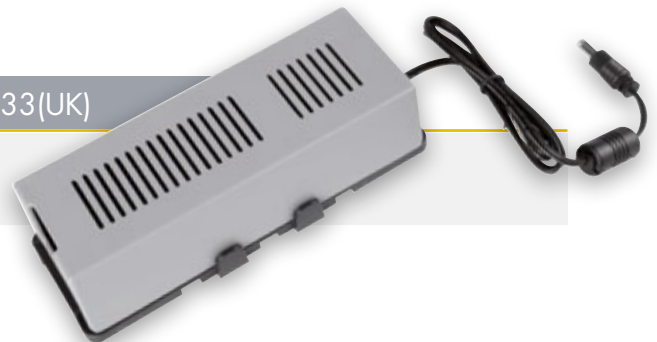


9933(UK)		
AC input	-	230 V~/50 Hz
DC output	VDC	15
Max. Output/ current	A	2
Connector	mm/female	Jack 2,1
Dimensions	mm	176 x 71 x 47

Digital SCR Solutions

2461 Power Supply

- powers SCR products without overloading the set-top boxes
- copies the set-top box voltage, tone and DiSEqC to the SCR product (EN50494 and EN50607)

2461

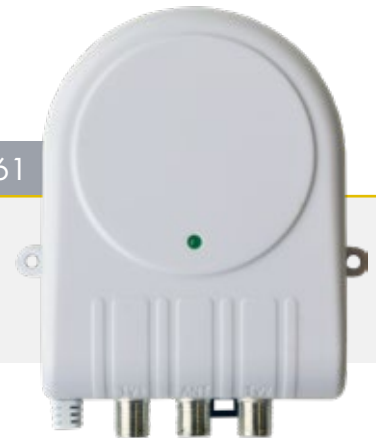

2461		
Inputs	-	1
Outputs	-	2
Frequency range	MHz	950 - 2150
Insertion loss	dB	6
Return loss	dB	> 10
Input voltage	VAC	100 - 240
Output voltage	VDC	18
Output current	mA	500
Dimensions	mm	110 x 94 x 41
Supported standards	-	EN50494, EN50607

4603 Smart Splitter

Standard splitters can give collisions when two commands come at the same time or when one of the set-top boxes uses a permanent high voltage. A smart splitter captures the commands of the different set-top boxes and serializes them to guarantee no collisions happen.

4603



- indoor housing
- 3-way
- no power adapter needed
- buffers and sends out the different command signals

4603		
Way	-	3
Frequency	MHz	5-2150
Insertion Loss	dB	9
Return loss in/out	dB	> 10
DC power pass	mA	500 max.
Input voltage	VDC	10 min. / 20 max.
Message buffer	-	3/receiver port
Dimensions	mm	40 x 68 x 140
Supported standards	-	Sky UK, EN 50494

Digital SCR Solutions


9669 Power inserter

The power inserter enables you to add DC-power on to a coaxial cable.

- dSCR power inserter for trunk powering

		9669
Frequency range	MHz	250 - 2340
Insertion loss	dB	1
DC power pass	A	3,25
Dimensions	mm	61 x 51 x 16

9669

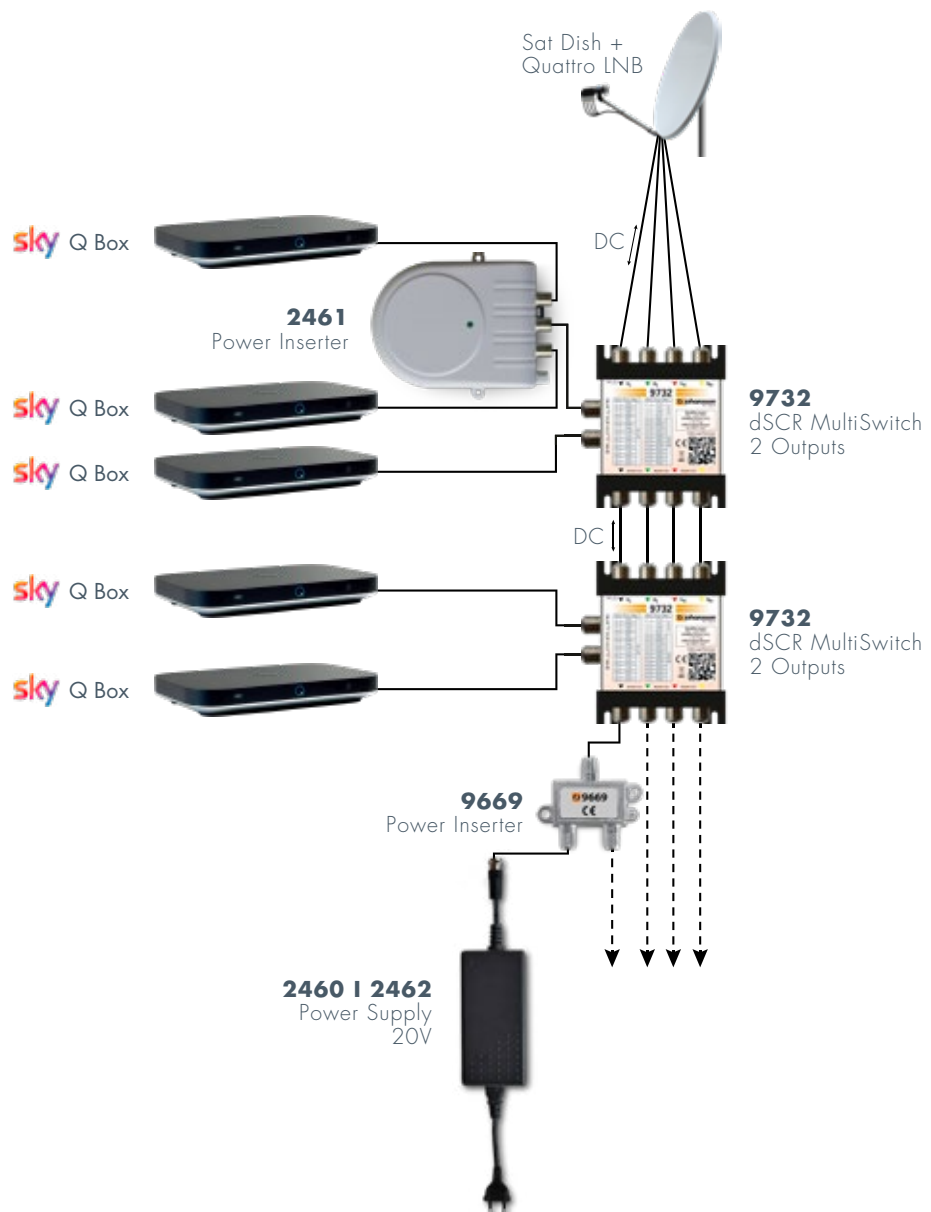


Digital SCR Solutions

9930(UK) Power Inserter

The 9930 is a satellite power inserter, which can be used to ensure a universal LNB is locked on the correct satellite band. Each of the 4 inputs can be configured to deliver the desired control signals (13/18V + 0/22 kHz). The selected control signal is indicated by a bi-color LED.

- 4 satellite inputs / 4 satellite outputs
- frequency range: 5-2150 MHz
- current/input: up to 350 mA
- low insertion loss: <1 dB
- independent satellite band for each input (indicated by bi-color LED)

9930(UK)

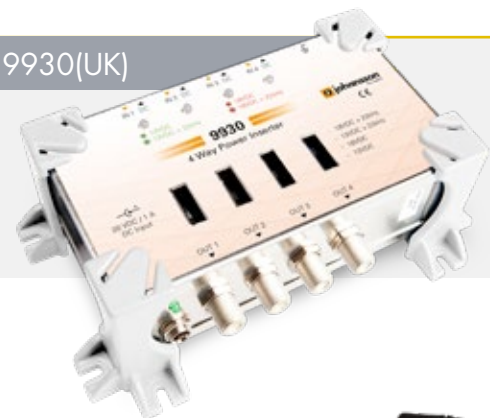

9930(UK)		
Inputs	-	4
Frequency range	MHz	5 - 2150
Insertion loss	dB	< 1
Isolation between ports	dB	> 35
Return loss	dB	> 10
Control signals	VDC	switchable: 13/18/13 + tone/18 + tone
Added power supply adapter	-	20V - 1A
Dimensions	mm	158 x 102 x 51

Digital SCR Solutions

9935 - 9654 Satellite IF Amplifiers

- separate adjustment for sloped gain on every line
- DC input for powering trunk line amplifiers & LNB
- works from 12 to 20 VDC


9935



SAT Distribution
(SCR & Legacy)

- compatible with Wideband LNBs
- separate adjustment for sloped gain on every line
- DC input for powering trunk line amplifiers & LNB
- works from 12 to 20 VDC

9654

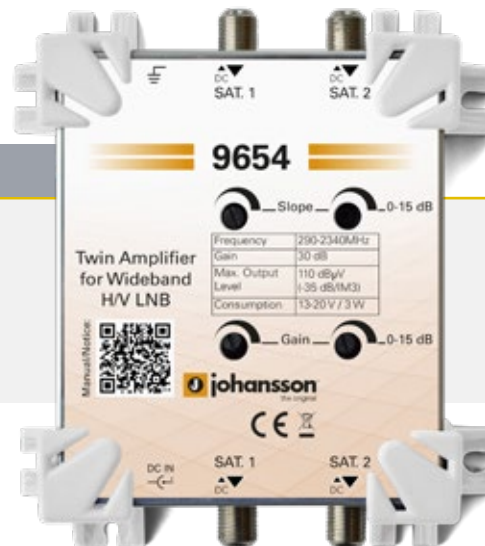

		9935	9654
Inputs	-	4 SAT + 1 TERR	2 SAT
Outputs	-	5	2
Frequency range	MHz	Sat.: 950-2300 MHz Terr.: 5-65 MHz + 87-862 MHz	290-2340
Gain	dB	Sat.: 20-25 dB(sloped) Terr.: 87-862 MHz - 20-27 dB (sloped) return path: - 1 dB	30
Noise figure	dB	Sat.: 5 dB - Terr.: 6 dB	5
Gain adjustment	dB	Sat.: 20 dB - Terr.: 20 dB	15
Slope adjustment	dB	-	15
Max. Output level	-	Sat.: 110 dBμV (-35 dB/IM3) Terr.: RP: passive 87-862 MHz: 114 dBμV (-54 dB/IM3)	110 dBμV (-35 dB/IM3)
Consumption	-	200 mA 12 - 20 VDC external power supply or input/output	150mA 12 - 20 VDC external power supply or input/output
Dimensions	mm	158 x 102 x 51	129 x 114 x 51

Digital SCR Solutions

9937 - 9938 - 9939 Satellite Splitter/ Taps

9937

- 2-way satellite splitter
- terrestrial input/output
- DC power pass
- 5 dB loss



9937		
Nb of inputs	-	4 SAT + 1 Terr
Nb of outputs	-	2 x 5
Frequency range	MHz	Sat.: 950-2300 Terr.: 5-862
Loss	dB	Sat.: 5 - Terr.: 5
DC power pass in / out	-	yes
Dimensions	mm	158 x 162 x 51

9938

- 2-way satellite tap
- terrestrial input/output (ref. 9939)
- DC power pass
- loss: 10 dB (tap loss) / 1 dB (through loss)



9939



		9938	9939
Nb of inputs	-	4 SAT	4 SAT + 1 TERR
Nb of outputs	-	4 taps/ 4 through	5 taps/ 5 through
Frequency range	MHz	950-2300	Sat.: 950-2300 Terr.: 5-862
Tap loss	dB	-10	Sat.: -10 Terr.: -13
Through loss	dB	-1	Sat.: -1 Terr.: -1
DC power pass in/tap/out	-	yes	yes
Dimensions	mm	142 x158 x 51	142 x 158 x 51

Digital SCR Solutions

Additional products

MULTISWITCH

4+1			
4 outputs		Sat.	Ter.
9942	cascadable	-10 dB	-15 dB
9943	end unit	-5 dB	-15 dB
6 outputs		Sat.	Ter.
9946	cascadable	-10 dB	-15 dB
9947	end unit	-5 dB	-15 dB
8 outputs		Sat.	Ter.
9950	cascadable	-10 dB	-20 dB
9951	end unit	-5 dB	-20 dB
12 outputs		Sat.	Ter.
9954	cascadable	-10 dB	-20 dB
9955	end unit	-5 dB	-20 dB
16 outputs		Sat.	Ter.
9958	cascadable	-10 dB	-25 dB
9959	end unit	-5 dB	-20 dB

8+1			
8 outputs		Sat.	Ter.
9980	cascadable	-10 dB	-20 dB
9981	end unit	-5 dB	-20 dB
12 outputs		Sat.	Ter.
9984	cascadable	-10 dB	-20 dB
9985	end unit	-5 dB	-20 dB

SAT Distribution
(SCR & Legacy)

PASSIVE SPLITTER

4492	2 Way Splitter	40 MHz - 3,6 GHz
4494	4 Way Splitter 3,6 GHz	40 MHz - 3,6 GHz
4498	8 Way Splitter 3,6 GHz	40 MHz - 3,6 GHz

Variants for digital SCR multiswitches are possible

Custom software solutions are available to meet your unique system requirements.
Variants can be made on request.

Wideband Satellite Distribution

- ▶ Wideband Satellite Distribution is a new and more efficient way of distributing satellite signals. While in universal LNBs, the Ku band is split in a low and high part for both vertical and horizontal polarisation, the wideband LNB converts each polarisation as a whole, leaving only 2 cables coming from the LNB. This is a much more efficient way of distribution, with the following benefits.
 - lower consumption in all products of the distribution
 - lower cost of the products
 - less cables needed, making the installation cheaper
 - less connections, which leads to a more reliable system



INDEX

WIDEBAND SATELLITE DISTRIBUTION

9720	Wideband LNB	48
9653	Wideband Line Amplifier	48
9654	Wideband Satellite Trunk Amplifier	48
9655	Wideband Splitter	49
9656	Wideband Tap	49
9646	Wideband to Quattro Converter	49

Wideband Satellite Distribution

9720 - 9653 - 9654 LNB - Line Amplifier - Satellite Trunk Amplifier

The first product in this wideband satellite range is the Wideband LNB. It receives any standard Ku satellite signal and generates a Horizontal and Vertical IF signal. Each output contains both the low and the high band of the polarization.

9720

- LNB, able to receive 1 Ku satellite orbital slot
- 1 Horizontal and 1 Vertical output
- low noise
- output frequency range 290-2340 MHz




9653

- sloped gain for compensating coaxial cable losses
- 40-2400 MHz



9654

- separate adjustment for gain and slope on every line
- DC input for powering trunk line amplifier & LNB
- works from 12 to 20 VDC
- 290-2400 MHz

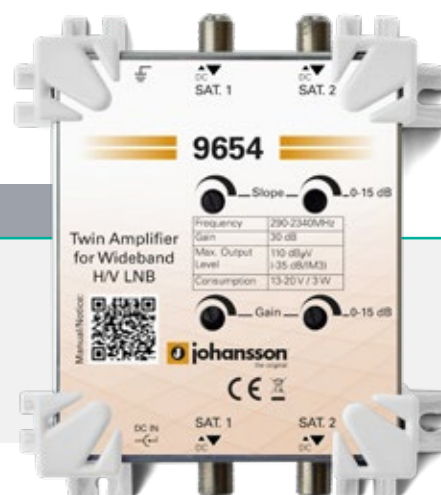


Wideband Satellite Distribution

9655 - 9656 - 9646 Splitter - Tap - Quattro converter




- 2-way splitter for wideband trunklines (H/V)
- Low insertion loss
- DC power pass
- 40-2400 MHz

9655

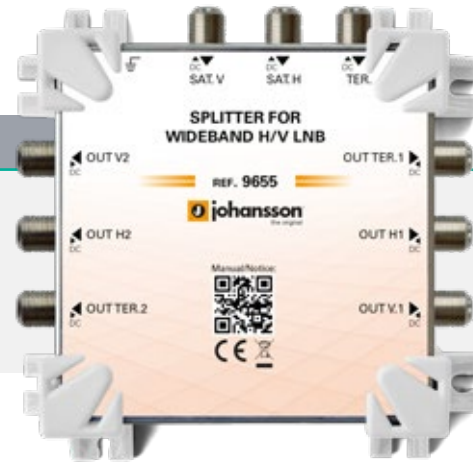

- 2-way tap for wideband trunklines (H/V)
- Low insertion loss
- DC power pass
- 40-2400 MHz

9656

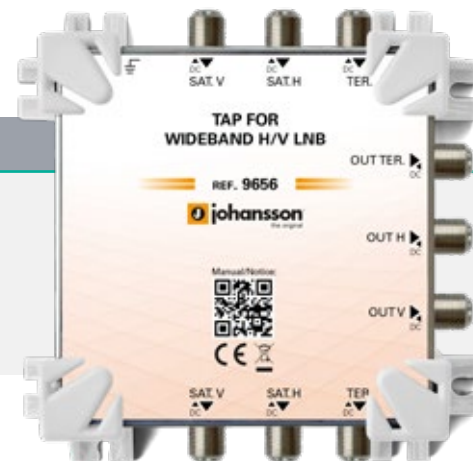

This wideband to quattro converter makes it possible to upgrade a complete system to a wideband application, without disabling the homes that do not have wideband tuners.


- converts a wideband LNB (V,H) into a quattro LNB (VL, HL, VH, HH)
- DC pass through on VL to power the wideband LNB
- ideal for systems with a mix of new wideband set-top boxes and other set-top boxes

9646




Wideband Satellite Distribution

WIDEBAND Application

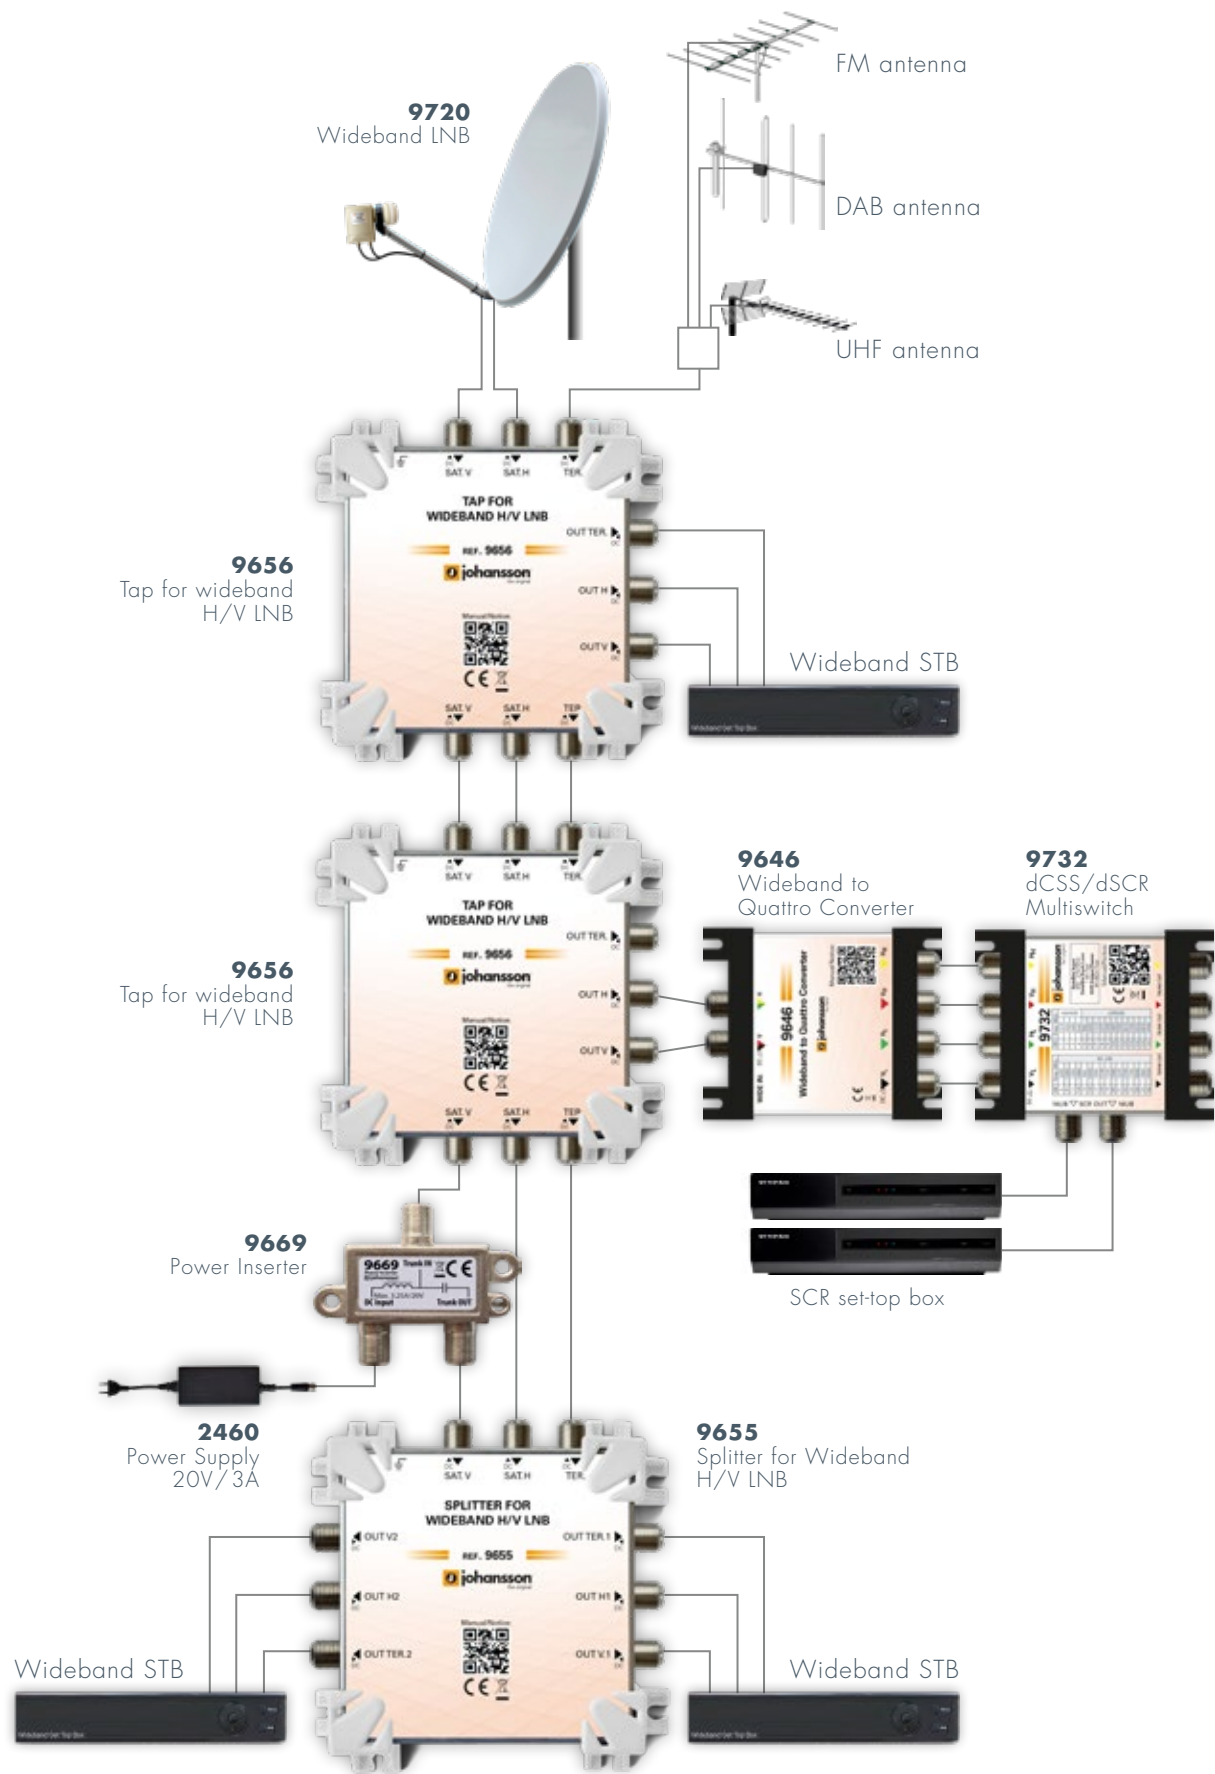


Wideband Satellite Distribution

WIDEBAND Application for 1 satellite orbital position

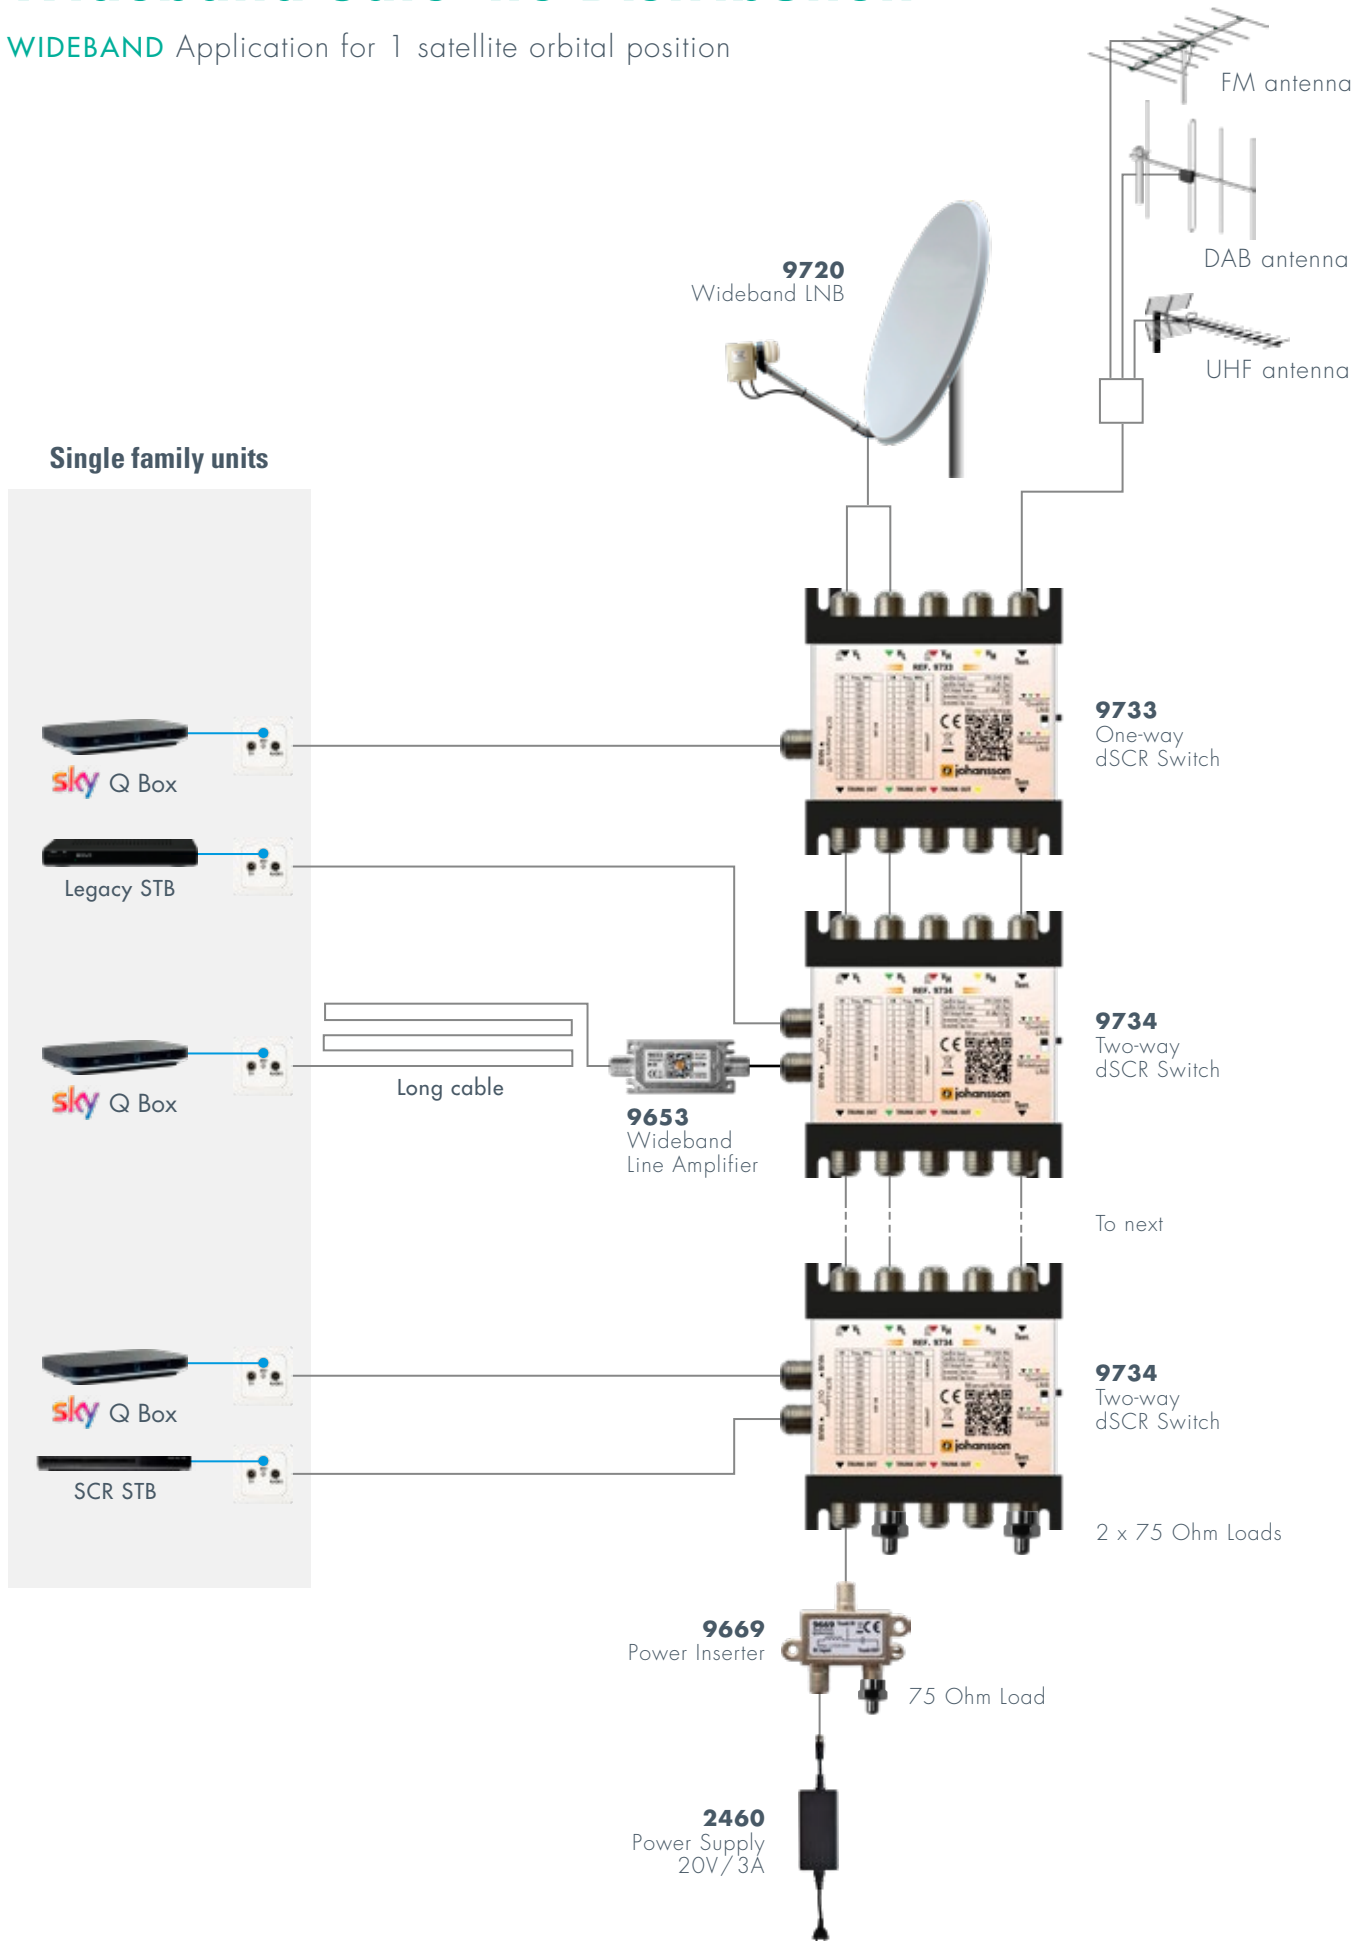


Wideband Satellite Distribution

WIDEBAND Application for 2 satellite orbital positions

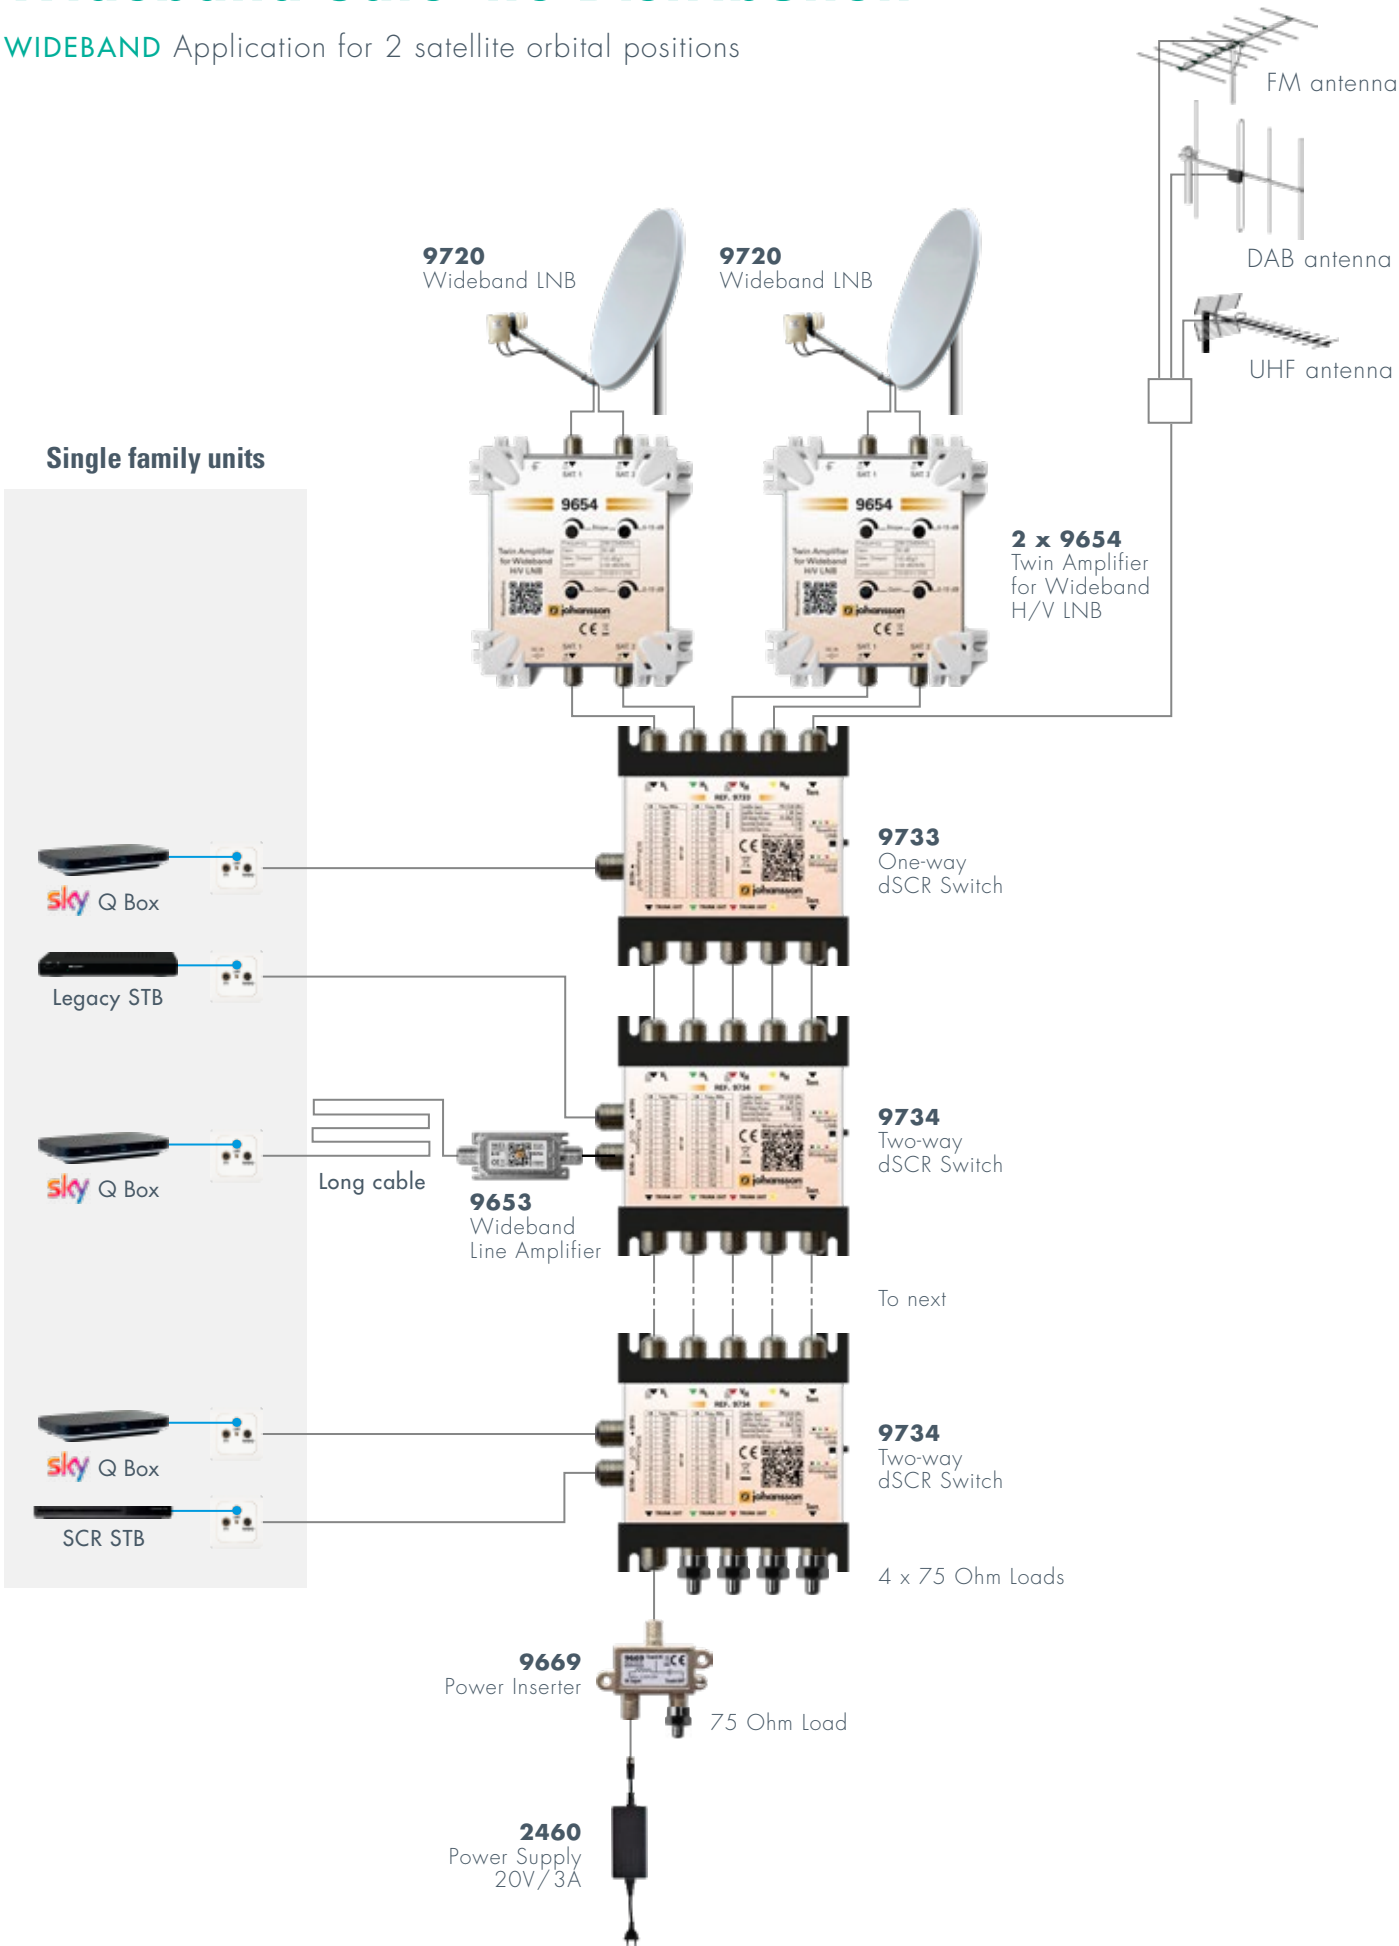

Wideband Satellite Distribution

WIDEBAND Application with wideband LNBs

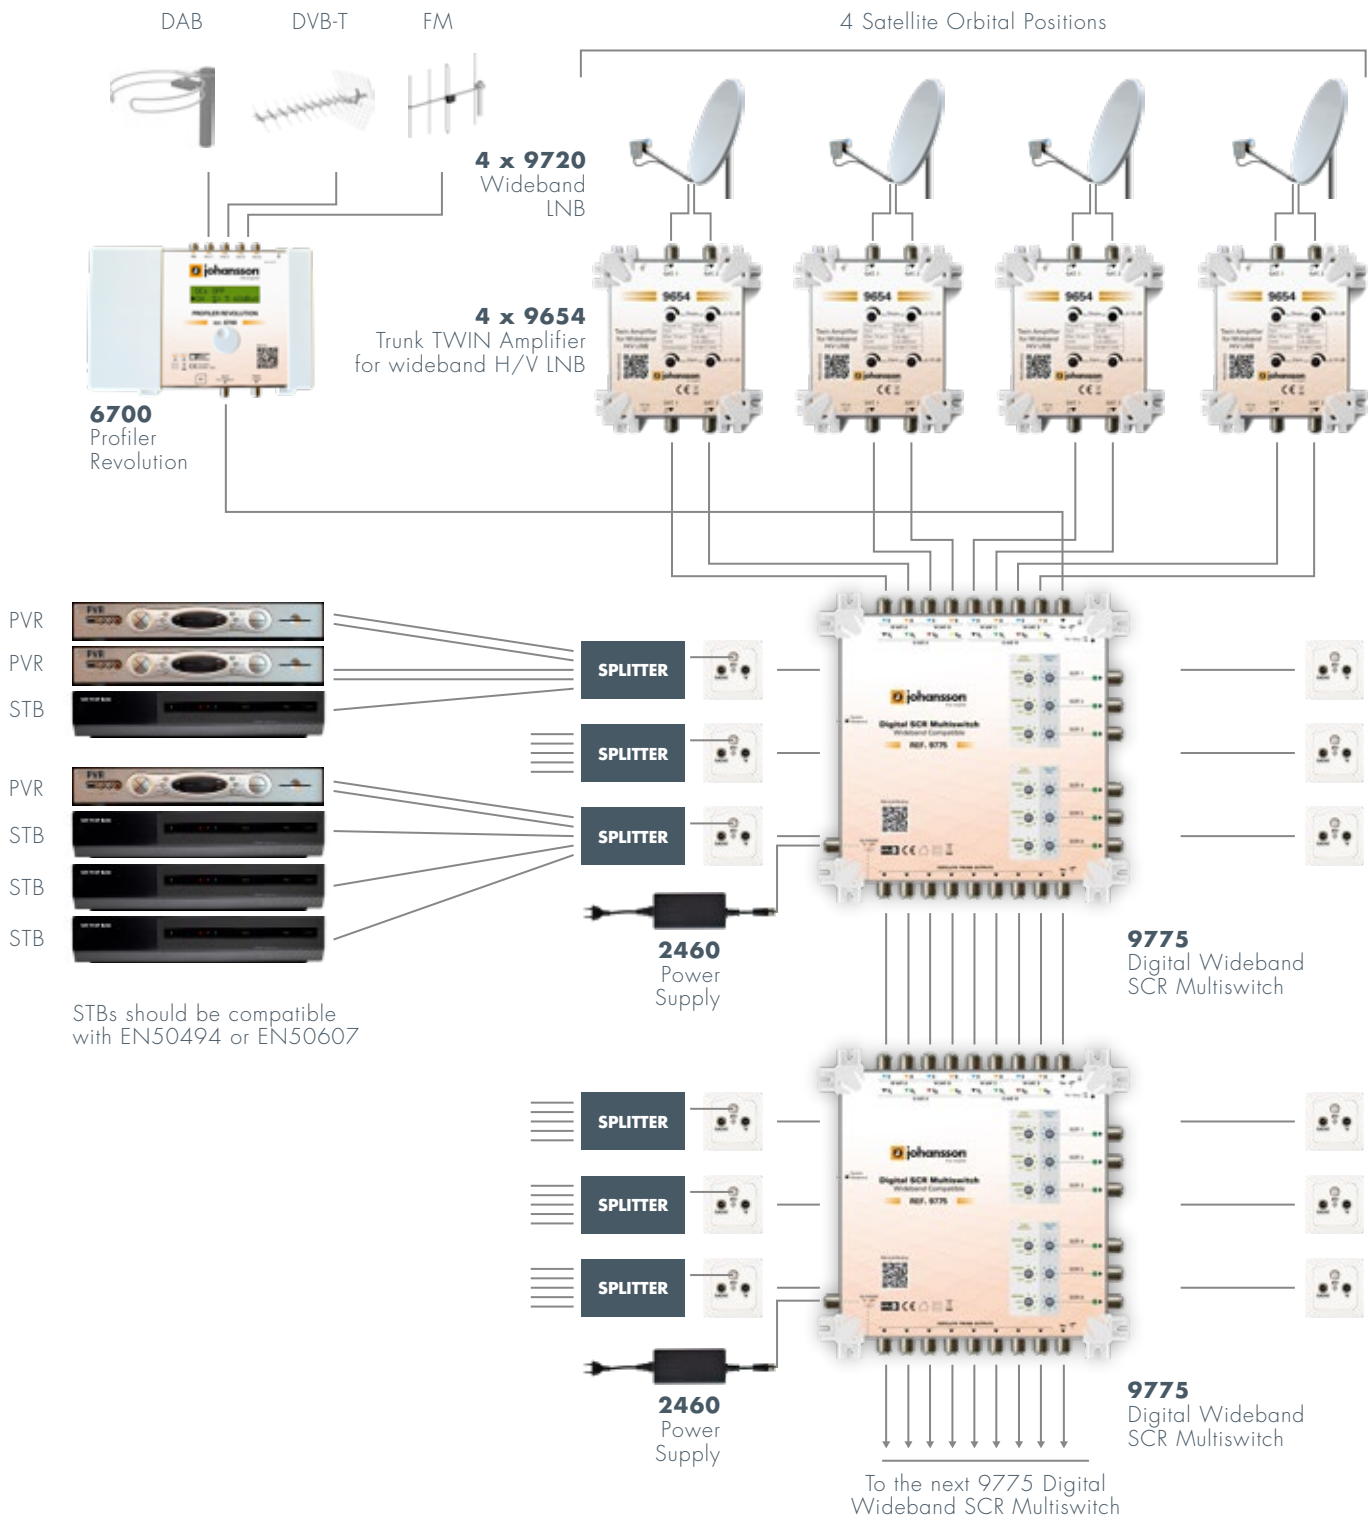

Profilers

- The market leading Johansson Profilers are a range of programmable filter-amplifiers. The signals coming from multiple antennas can be combined, filtered, amplified and converted. This offers the best possible signal for distribution of TV throughout the building. The profilers are very flexible and can be configured to your specific needs.

We proudly present you our Profiler Revolution. This amazing range of products has no equivalent on the market. The revolutionary technology will make your terrestrial installations much more successful.



INDEX

PROFILERS

IMPROVED SPECS	6700	Profiler Revolution	56
IMPROVED SPECS	6702	Profiler Revolution SAT	57
IMPROVED SPECS	6710	Profino Revolution	58
IMPROVED SPECS	6712	Profino Revolution SAT	58
	6503L	Programmable Filter-Equalizers	59
	6504	Programmable Filter-Equalizers	59



Five New Joys

Await you in the Profiler Revolution

1. High VHF/UHF output power + improved multi-channel output power
2. 25% more energy efficient
3. Intuitive and fast installation
4. Improved VHF/UHF gain + improved slope + VHF/DAB attenuator
5. Multiple variants are tailored for your specific installation

Profilers

6700 Profiler Revolution



The Johansson Profiler Revolution has no equivalent on the market due to its revolutionary technology. As the market leader in digital terrestrial programmable filter amplifier technology, the Profiler Revolution has already been sold in more than 30 countries.



6700

- programmable terrestrial filter amplifier
- 5 inputs: 4 VHF(DAB)/UHF and 1 FM
- read-out of input level strength: no need for field strength meter
- can process and convert more than 50 channels
- sharpest filters on the market (50 dB on adjacent channels)
- real-time AGC on all individual multiplexes
- flex matrix: complete flexibility in assigning filters from any input
- made in Europe, for worldwide application
- the Profiler Revolution facilitates straightforward configuration and is the most cost-efficient Profiler on the market
- configuration possible in different languages (English, French, Italian, Spanish)
- prepare your configuration file with uCloud
- RED compliant



IMPROVED SPECS

6700*

Inputs	-	4 VHF/UHF + 1FM
Outputs	-	1 main (FM-VHF-UHF) + 1 test port (-30dB)
Frequency range	MHz	FM: 88 - 108 VHF: 174 - 240 UHF: 470 - 862
LTE Protection	MHz	Automatic selection: 694, 790 or OFF
Input level	dBµV	FM: 37 - 77 VHF: 40** - 109 UHF: 40** - 109
FM output power (60dB/IM3)	dBµV	113
VHF/UHF output power (60dB/IM3)	dBµV	120
VHF/UHF output power (35dB/IM3)	dBµV	131
VHF/UHF output power with 1 MUX	dBµV	113
VHF/UHF output power with 6 MUX	dBµV	110
Conversion	-	Yes (from any VHF-UHF channel to any VHF-UHF channel)
Add channels	-	Per 1 or 2 Muxes
Number of channels	-	More than 50
Gain	dB	FM: 35 VHF: >60 UHF: >60
Gain adjustment	dB	FM: 20 VHF/UHF: Channel AGC
General attenuator	dB	20
VHF/DAB attenuator	dB	15
Slope adjustment	dB	15
Selectivity	dB/1MHz	35
Output MER	dB	VHF: 35 UHF: 35
ESD protection	-	All inputs
Remote voltage for preamp	V	12 or 24
Remote current	mA	100 (total for the 4 inputs)
SD port	-	Yes (for copy configuration)
Operating temperature	°C	-5 to +50
Power Supply	Vac	100 - 240
Power Consumption	W	15
Dimensions	mm	217 x 165 x 59
Weight	kg	0,8

*Patent pending (6700)

** For 64QAM with code rate 3/4

Profilers

6702 Profiler Revolution SAT

When satellite content must be combined with a terrestrial source, additional and expensive equipment must be installed. With the Profiler Revolution SAT, this problem is solved. The 6702 is a state-of-the-art Profiler Revolution, and an additional Satellite stream band can be added to the output.



6702

- read-out of input level strength: no need for field strength meter
- can process more than 50 channels (Terrestrial and Satellite)
- can convert a wide selection of Terrestrial channels
- sharpest filters on the market (50 dB on adjacent channels)
- real-time AGC on all individual multiplexes
- flex matrix: complete flexibility in assigning filters from any input
- made in Europe, for worldwide application
- the Profiler Revolution SAT facilitates straightforward configuration
- RED compliant



IMPROVED SPECS

6702*

Inputs	-	1 SAT + 1 FM + 4 VHF/UHF
Outputs	-	1 main (SAT-FM-VHF-UHF) + 1 test port (-30dB)
Frequency range	MHz	SAT: 950 - 2400 FM: 88 - 108 VHF: 174 - 240 UHF: 470 - 862
LTE Protection	MHz	Automatic selection: 694, 790 or OFF
Input level	dBµV	SAT: 40 - 95 FM: 37 - 77 VHF: 40** - 109 UHF: 40** - 109
SAT output power (-35dBc/IM3 2 carriers)	dBµV	119
FM output power (60dB/IM3)	dBµV	113
VHF/UHF output power (60dB/IM3)	dBµV	120
VHF/UHF output power (35dB/IM3)	dBµV	131
VHF/UHF output power with 1 MUX	dBµV	113
VHF/UHF output power with 6 MUX	dBµV	110
Conversion	-	Yes (from any VHF-UHF channel to any VHF-UHF channel)
Add channels	-	Per 1 or 2 Muxes (for terrestrial)
Number of channels	-	More than 50
Gain	dB	SAT: 40 FM: 35 VHF: >60 UHF: >60
Gain adjustment	dB	SAT: 20 FM: 20 VHF/UHF: Channel AGC
Noise figure	dB	SAT: 8
General attenuator	dB	20 (on terrestrial only)
VHF/DAB attenuator	dB	15
Slope adjustment	dB	SAT: 12 VHF/UHF: 15
Selectivity	dB/1MHz	SAT: 40 (@ 862 MHz) VHF/UHF: 35
Return loss	dB	SAT: 10
Output MER	dB	VHF: 35 UHF: 35
ESD protection	-	All inputs
DC @ VHF/UHF input	V	12 or 24
DC Load current @ VHF/UHF input	mA	100 (total for the 4 VHF/UHF inputs)
DC @ SAT input	-	13V/18V/Bypass & 0/22kHz selectable by SW
DC Load current @ SAT input	mA	300
SD port	-	Yes (for copy configuration)
Operating temperature	°C	-5 to +50
Power Supply	Vac	100 - 240
Power Consumption	W	25
Dimensions	mm	217 x 165 x 59
Weight	kg	0,85

*Patent pending (6702)

** For 64QAM with code rate 3/4

Profilers

6710 Profino Revolution



The Profino Revolution has 1 FM, 1 DAB/VHF and 2 UHF inputs.

Up to 20 Channels can be filtered and amplified. The filters on adjacent channels are extremely sharp.



6710

- read-out of input level strength: no need for field strength meter
- can process up to 20 channels (conversion is not possible)
- sharpest filters on the market (50 dB on adjacent channels)
- real-time AGC on all individual multiplexes
- flex matrix: complete flexibility in assigning filters from any input
- made in Europe, for worldwide application
- the Profino Revolution is really easy to install
- RED compliant
- **6712**: SAT variant of the 6710



IMPROVED SPECS

6710*

Inputs	-	1 FM + 1 DAB/VHF + 2 UHF
Outputs	-	1 main (FM-DAB-VHF-UHF) + 1 test port (-30dB)
Frequency range	MHz	FM: 88 - 108 VHF: 174 - 240 UHF: 470 - 862
LTE Protection	MHz	Automatic selection: 694, 790 or OFF
Input level	dBμV	FM: 37 - 77 VHF: 45** - 109 UHF: 45** - 109
FM output power (60dB/1M3)	dBμV	113
VHF/UHF output power (60dB/1M3)	dBμV	115
VHF/UHF output power (35dB/1M3)	dBμV	126
VHF/UHF output power with 6 MUX	dBμV	105
Conversion	-	No
Number of channels	-	20 (10 filters)
Gain	dB	FM: 35 VHF: >60 UHF: >60
Gain adjustment	dB	FM: 20 VHF/UHF: Channel AGC
General attenuator	dB	20
VHF/DAB attenuator	dB	15
Selectivity	dB/1MHz	35
Return loss	dB	10
Output MER	dB	VHF: 35 UHF: 35
ESD protection	-	All inputs
Remote voltage for preamp	V	12 or 24
Remote current	mA	100 (total for the 3 inputs)
SD port	-	No
Operating temperature	°C	-5 to +50
Power Supply	Vac	100 - 240
Power Consumption	W	11
Dimensions	mm	217 x 165 x 59
Weight	kg	0,8

*Patent pending (6710)

** For 64QAM with code rate 3/4

Profilers

6503(L)(UK) - 6504(UK) Programmable Filter-Equalizer



- 2 UHF inputs
- 6 UHF clusters from 1 to 7 channels bandwidth
- selectable remote power on all inputs
- LTE protected

6503L(UK)



6504(UK)

- 3 UHF inputs
- 10 UHF clusters from 1 to 7 channels bandwidth
- selectable remote power on all inputs



		6503L(UK)		6504(UK)		
Input	-	2		3		
Output	-	1		1		
Number of clusters	-	6		10		
Input	-	UHF 1	UHF 2	UHF1	UHF2	UHF3
Channels	-	21 - 60	21 - 60	-		
Frequency range	MHz	470 - 790	470 - 790	470 - 862		
Bandwidth/Cluster	MHz	8 - 56 (1 to 7 Ch.)				
Configuration of clusters	-	6	0	2	8	0
		5	1	2	7	1
		3	3	2	5	3
Gain	dB	5				
Attenuator	dB/ 1 dB step	30	30	-		
Noise figure	dB	6				
Max. input level*	dBμV	95				
Max. output level*	dBμV	75				
Selectivity	-	10dB / 10MHz	10dB / 10MHz	20dB / Ch±2		
Return loss IN/OUT	dB	> 10				
Selectable DC power pass	-	Yes				
Power supply	-	External power adapter: 230 - 240V~ / 5 VDC / Ø2,1 mm DC jack				
Consumption	mA	350		500		
Operating temperature	°C	-5 to +50				
Dimensions	mm	222 x 142 x 65				

*Terr.: -54 dBc/IM3

Fiber Optical Distribution

- ▶ In the second half of 2019, we will present **our new satellite fiber distribution range**. We propose an easy-to-install solution to equip buildings with a satellite fiber system or to replace traditional coaxial systems by a compact fiber system. This will result in longer distance reach, lower signal degradation and lower equipment costs. These budget friendly products will solve cable losses in large MDU's, ideal for high buildings, tourist areas, compounds, etc.


We will offer an end-to-end solution starting from the LNB over fiber to the STB.
Our range will include:

- Fiber Headend with wideband inputs
- Fiber receivers with wideband outputs
- Passive Optical Splitters
- Fiber Termination Units with integrated SCR technology

The system will be compatible with our new range of SCR multiswitches that are wideband compatible. It will support huge installations, with up to 128 passive splits, in combination with our compact satellite convertors (ref. 9780).

Without a doubt, our satellite fiber distribution range will improve your installations.

More info: sales@unitrongroup.com

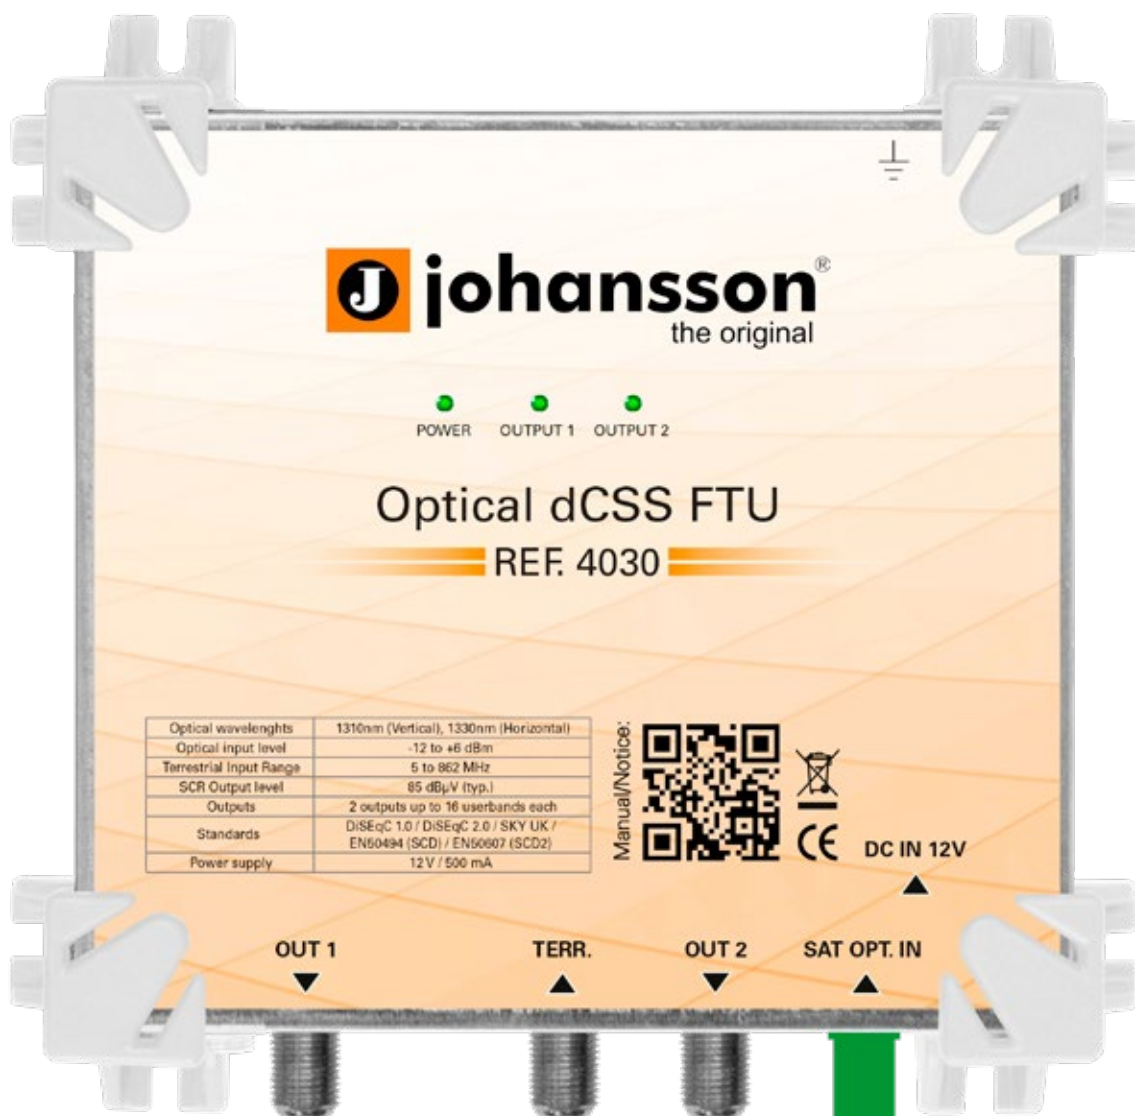

Full product range to be launched soon
Stay tuned! More info: sales@unitrongs.com

Amplifiers

- An essential part in the distribution of TV signals over coaxial cables is the amplifier. In domestic applications, this will typically be a masthead preamplifier while large collective installations require high-power distribution amplifiers. With the upcoming LTE (4G and 5G) signals in several countries, big disturbances will arise in the TV systems that are not LTE-protected. This is why we present a whole new range of amplifiers that makes your installations future proof, and offer you the best TV images possible!



INDEX

AMPLIFIERS

7781	Multiband Amplifier	64	NEW
7784	Multiband Amplifier	64	NEW
7785	Multiband Amplifier	64	NEW
7720	Wideband indoor amplifier	65	
7720L	Wideband indoor amplifier	65	
7720L2	Wideband indoor amplifier	65	
7722	VHF/UHF indoor amplifier	65	
7722L	VHF/UHF indoor amplifier	65	
7722L2	VHF/UHF indoor amplifier	65	
7724	VHF/UHF indoor amplifier	66	
7724L2	VHF/UHF indoor amplifier	66	
9671L	TV-SAT indoor amplifier	67	
9672L	TV-SAT indoor amplifier	67	
9674L	TV-SAT indoor amplifier	67	
KITS	Preamplifier + Power Supply	68	
7322	UHF preamplifier	69	
7322L2	UHF preamplifier (LTE/5G)	69	
7327	UHF preamplifier	69	
7327L2	UHF preamplifier (LTE/5G)	69	
7328	UHF preamplifier	69	
7329	UHF preamplifier (LTE/5G)	69	
7332	UHF preamplifier (LTE/5G)	70	NEW
7415L2	FM/DAB/UHF preamplifier (LTE/5G)	71	
7460L2	DAB/UHF preamplifier (LTE/5G)	71	
2436	Power Supply	72	
ADDITIONAL PRODUCTS		73	

Amplifiers

7781 - 7784 - 7785 Multiband Distribution Amplifiers

Johansson offers a new range of Multiband distribution amplifiers. The RED compliant amplifiers are fully LTE-ready and have a high gain. This ensures a perfect signal quality throughout the building. The amplifiers are far more efficient than their predecessors.

7781 | 7784 | 7785

- 1 input (7781), 4 inputs (7784) or 5 inputs (7785)
- split-band amplifiers with interstage attenuators and dynamic range of 20 dB
- high gain, high output power
- high input power to ensure input overload is virtually impossible
- VDC switchable remote power
- compact housing
- detachable power supply (included)
- -30 dB test output
- RED compliant



		NEW					NEW					NEW				
		7781		7784			7785									
Inputs	-	Cable	BI/FM	BIII/ DAB	UHF1	UHF2	BI/FM	BIII/ DAB	UHF1	UHF2	SAT					
Frequency range	MHz	47-862	BI/FM: 47-108 BIII/DAB: 174-240 UHF1: 470-694 or 862 (switchable) UHF2: 470-694 or 862 (switchable)				BI/FM: 47-108 BIII/DAB: 174-240 UHF1: 470-694 or 862 (switchable) UHF2: 470-694 or 862 (switchable) SAT: 950-2400									
Gain	dB	14-34	BI/FM: 20-40	BIII/ DAB: 20-40	UHF1: 20-40	UHF2: 20-40	BI/ FM: 20-40	BIII/ DAB: 20-40	UHF1: 20-40	UHF2: 20-40	SAT: 10-30					
Slope adjustment	dB	-	-				SAT: 0-10									
Max. input power	dBpV	100	BI/FM (-60dBc): 94 BIII/DAB(-60dBc): 92 UHF1 (-60dBc): 96 UHF2 (-60dBc): 96				BI/FM (-60dBc): 94 BIII/DAB(-60dBc): 92 UHF1 (-60dBc): 96 UHF2 (-60dBc): 96 SAT(-35dBc): 97									
Max. output power	dBpV	116	BI/FM (-60dBc): 118 BIII/DAB(-60dBc): 119 UHF1 (-60dBc): 118 UHF2 (-60dBc): 118				BI/FM (-60dBc): 118 BIII/DAB(-60dBc): 119 UHF1 (-60dBc): 118 UHF2 (-60dBc): 118 SAT(-35dBc): 115									
Noise figure	dB	7	BI/FM: 4.5	BIII/ DAB: 4	UHF1: 5.5	UHF2: 5.5	BI/ FM: 4.5	BIII/ DAB: 4	UHF1: 5.5	UHF2: 5.5	SAT: 7.5					
Return loss	dB	>10														
Test Port	dB	-30														
Remote power	V	-	OFF - 12V - 24V													
DC Mode	mA	-	BIII/DAB: 100					UHF1: 100		UHF2: 100						
DC Mode SAT	V	-	-				OFF - 13V - 18V - 22kHz (Selection: internal, power inserter or external)									
SAT remote power	mA	-	-				350									
RED selectivity classification	-	0, 1, 2, 3 and 4														
Supply voltage	VAC	100 - 240														
Power consumption	W	8	23				29									
Dimensions	mm	217 x 165 x 59														

Amplifiers

7720(L)(L2) - 7722(L)(L2) Indoor Amplifiers



7720 | 7720L | 7720L2

- 1 wideband input: 47-862/790/694 MHz (VHF-UHF)
- 2 outputs
- adjustable gain: 13-28 dB
- power LED indicator
- wall and DIN rail mountable



NEW

		7720	7720L	7720L2
Frequency range	MHz	47-862	47-790	47-694
Adjustable gain	dB	13-28		
Noise figure	dB	4,0		
Max. output level	dBμV	101		
Return loss (input/output)	dB	10		
Isolation between outputs	dB	15		
Switchable remote power	-	24 VDC / 55 mA		
Power	-	230V~/4VA		
Dimensions	mm	110 x 94 x 41		



7722 | 7722L | 7722L2

- 1 input: 40-320 MHz + 470-862/790/694 MHz
- 2 outputs
- adjustable VHF gain: 15-30 dB
- adjustable UHF gain: 18-28 dB
- power LED indicator
- 24 Vdc switchable remote power (except 7722)
- wall and DIN rail mountable



NEW

		7722	7722L	7722L2
Frequency range	MHz	40-320 + 470-862	40-320 + 470-790	40-320 + 470-694
Adjustable gain	dB	VHF: 15-30/UHF: 18-28		
Noise figure	dB	3,0		
Max. output level*	dBμV	107		
Return loss (input/output)	dB	10		
Isolation between outputs	dB	15		
Switchable remote power	-	no	yes (24V/55mA)	
Power	-	230V~ /6,9VA		
Dimensions	mm	102 x 76 x 54	137 x 92 x 42	

*Terr.: -60 dBc/IM3

Amplifiers

7724(L)(L2) VHF/UHF Indoor Amplifiers



7724L | 7724L2

- 1 input: 40-320 MHz + 470-790/694 MHz
- 4 outputs
- adjustable VHF gain: 13-28 dB
- adjustable UHF gain: 15-25 dB
- power LED indicator
- 24 Vdc switchable remote power
- wall and DIN rail mountable



NEW

		7724L	I	7724L2
Frequency range	MHz	40-320 + 470-790		40-320 + 470-694
Adjustable gain	dB	VHF: 13-28/UHF: 15-25		
Noise figure	dB	3,0		
Max. output level	dBµV	102		
Return loss (input/output)	dB	10		
Isolation between outputs	dB	15		
Switchable remote power	-	yes (24V/55mA)		
Power	-	230V~ /6,9VA		
Dimensions	mm	137 x 92 x 42		

Amplifiers

9671L - 9672L - 9674L TV-Sat Indoor Amplifiers



9671L



- 1 input/1 output
- LTE (4G) compatible
- adjustable gain
- gain TER: 27/ gain SAT: 32
- fixed slope on satellite
- DC power pass: switchable
- universal input power: 85-240V~

9672L



- 1 input/2 outputs
- LTE (4G) compatible
- adjustable gain
- gain TER: 24/ gain SAT: 28
- fixed slope on satellite
- DC power pass: switchable
- universal input power: 85-240V~

9674L



- 1 input/4 outputs
- LTE (4G) compatible
- adjustable gain
- gain TER: 18/ gain SAT: 22
- fixed slope on satellite
- DC power pass: switchable
- universal input power: 85-240V~

		9671L		9672L		9674L
Output	-	1		2		4
Frequency range	MHz	47 - 790 / 950 2150				
Gain	dB	Ter.: 7 - 27 Sat.: 12 - 32		Ter.: 4 - 24 Sat.: 8 - 28		Ter.: 0 - 18 Sat.: 2 - 22
Slope adjustment	dB	8, fixed				
Noise figure	dB	Ter.: 4 Sat.: 7				
Max. output level	dBμV	113		108		103
Power consumption	-	85-240 VAC / 50-60 Hz / 7 VA				
Selectable DC power pass	-	switchable				
Dimensions	mm	137 x 92 x 42				

Amplifiers

KITS UHF Preamplifier + Power Supply

KIT 7322 - KIT 7328 (LTE/4G) - KIT 7322L2 - KIT 7329 (LTE/5G) - KIT 7332 (LTE/5G) RED

- 1 input/1 output
- LTE (4G) rejection
- ultra low-noise
- power indication LED



- 24 V high-efficiency power supply
- short-circuit protection
- 2 outputs
- power LED
- wall or DIN-rail mountable

KIT 7322

KIT 7328



- 1 input/1 output
- LTE (5G) rejection
- low-noise
- power indication LED



KIT 7322L2

KIT 7329



- 1 input/1 output
- LTE (5G) rejection
- low-noise
- power indication LED
- RED compliant class 1

NEW

KIT 7332



Amplifiers

7322 - 7327 - 7328 UHF Preamplifier (4G)

7327L2 - 7322L2 - 7329 UHF Preamplifier (5G)



7322 | 7327 | 7328

- 1 entrée / 1 sortie
- réjection LTE (4G)
- très faible facteur de bruit
- LED témoin



		7322	7327	7328
Frequency range	MHz	470-790 (Ch. 21-60)		
Gain	dB	10-25	15	15-35
Noise figure	dB	2,0	2,0	3,5
Input level	dBμV	80	78	82
Output level	dBμV	100	97	104
Power supply	VDC	24	5-24	24
Consumption	mA	35	20	35
Dimensions	mm	120 x 115 x 50		



7327L2 | 7322L2 | 7329

- 1 input/1 output
- LTE (5G) rejection
- low-noise
- power indication LED



		7327L2	7322L2	7329
Frequency range	MHz	470-694 (Ch. 21-48)		
Gain	dB	15	10-25	15-35
Noise figure	dB	2,0	2,0	3,5
Input level	dBμV	78	80	82
Output level	dBμV	97	105	104
Power Supply	VDC	5-24	24	24
Consumption	mA	20	50	35
Dimensions	mm	120 x 115 x 50	105 x 105 x 37	120 x 115 x 50

Amplifiers

7332 UHF Preamplifier (5G)



- 1 input/1 output
- LTE (5G) rejection
- low-noise
- 19-34 dB adjustable gain
- power indication LED
- 12-24 VDC operating voltage
- **RED compliant**



7332		
Frequency range	MHz	470-694 (Ch. 21-48)
Gain	dB	19-34
Noise figure	dB	2,0
Input level	dBµV	90
Output level	dBµV	110
Power Supply	VDC	12-24
Consumption	mA	110 (12V) / 60 (24V)
Dimensions	mm	120 x 115 x 50

Amplifiers

7460L2 - 7415L2 Preamplifier 2 - 3 inputs (LTE/5G)



- 1 x VHF input / 1 x UHF input
- 1 wideband output
- up to 105dBμV output power
- 5-20dB adjustable gain on VHF
- 15-35dB adjustable gain on UHF
- LTE (5G) + GSM rejection
- low-noise
- power indication LED
- 24 VDC operating voltage

7460L2



7460L2

Inputs	-	BIII/DAB	UHF (Ch. 21-48)
Frequency range	MHz	170-240	470-694
Gain	dB	5-20	20-35
Noise Figure	dB	4,2	2,5
Max. input level	dBμV	107	85
Max. Output level	dBμV	107	103
Power supply	VDC	24	
Consumption	mA	35	
Dimensions	mm	120 x 115 x 50	



- FM input/B.III or DAB input/UHF input
- 1 wideband output
- 12 dB gain on FM
- 15-30 dB adjustable gain on B.III/DAB
- 20-35 dB adjustable gain on UHF
- LTE (5G)
- low-noise
- 24 VDC operating voltage
- wall or mast mountable

7415L2



7415L2

Inputs	-	BII (FM)	BIII/DAB	UHF C21-48
Frequency range	MHz	88-108	170-240	470-694
Gain	dB	12	15-30	33-20
Noise Figure	dB	4	2,0	3,2
Max. input level	dBμV	99	91	84
Max. Output level	dBμV	111	107	108
Power supply	VDC	24		
Consumption	mA	60		
Dimensions	mm	112 x 98 56		

Amplifiers

2436 Power Supply



2436

- high-efficiency
- 2 outputs
- 24V stabilized
- short-circuit protection
- power LED indicator
- wall or DIN-rail mountable
- horizontal/vertical DIN-rail mounting



2436

		2436
Outputs	-	2
Insertion loss	dB	4-5
Isolation between outputs	dB	10
AC input voltage/Frequency/Power	-	100 - 240 V~ / 50 - 60 Hz / 4,6 W
DC output voltage	VDC	24
Output current	mA	150
Dimensions	mm	95 x 76 x 35

Amplifiers

ADDITIONAL PRODUCTS

PREAMPLIFIER / POWER SUPPLY KIT

KIT 7316/2430A	One Band Preamplifier and Power Supply	UHF: 25-40 dB
KIT 7404/2430A	2 inputs Preamplifier and Power Supply	VHF: 10-30 dB / UHF: 25-40 dB
KIT 7415/2430A	3 inputs Preamplifier-combiner and Power Supply	FM: 12 dB / BIII: 10-28 dB / UHF: 20-35 dB
KIT 7422/2430A	3 inputs Preamplifier and Power Supply	VHF: 10-30 dB / UHF: 25-40 dB / UHF: 25-40 dB
KIT 7422E/2430AE	3 inputs Preamplifier and Power Supply	VHF: 10-30 dB / UHF: 25-40 dB / UHF: 25-40 dB
KIT 7490/2430A	2 inputs Preamplifier-combiner and Power Supply	VHF: 10-30 dB / UHF: 25-40 dB

PREAMPLIFIER

7211	Multiband Preamplifier	UHF + VHF/VHF: 10-30 dB / UHF 25-40 dB
7316	One Band Preamplifier	UHF ch. 21-69, 25-40 dB adjustable
7410	3 inputs Preamplifier-combiner	BIII: 10-30 dB / UHF: 25-40 dB / UHF: 20-35 dB

Distribution Accessories

- ▶ Johansson offers a wide range of high-quality accessories for the distribution of terrestrial, cable and satellite TV. All products are designed with the future LTE-networks in mind and make sure your TV distribution system is future-proof!



INDEX

DISTRIBUTION ACCESSORIES

Filters	76
Splitters	78
Combiners	79
DiSEqC Switches	80
Line Amplifiers	81
Others	82
Additional products	84

Distribution Accessories

6022GSM - 6023C48 - 6023C58 - 6023C59 LTE (4G) Filter

Long Term Evolution (LTE) is a consequence of the digitization of the TV-signals. Digital signals offer a great bandwidth-advantage, which will be used for next-generation telecommunication applications (4G). This implies the UHF channels 61-69 will no longer be used for TV-purposes, and have to be filtered-out carefully to avoid interference! Our LTE-ready products offer strong filtering capabilities for the UHF channels 61-69 and the GSM-band.

The next LTE evolution is already happening. For the 5G networks, the UHF-channels will be limited to 694MHz (or channel 48). Look for the 5G logo in our catalog to find compatibel products.

- >15 dB LTE rejection
- wall or mast mountable with strap
- indoor and outdoor mountable

6022GSM

		6022GSM
Frequency range	MHz	5-790
Cut off channel	-	60
Insertion loss	dB	1
GSM rejection 880-960 MHz	dB	60
LTE (4G) rejection	dB	20
DC power pass	mA	500
Connectors	-	2 x F female
Mounting	-	Indoor/outdoor (indoor flange provided)
Dimensions	mm	112 x 98 x 56



Example of outdoor product

- 30 dB LTE rejection
- in-line small housing
- indoor use

6023C48 | 6023C58

		NEW	
		6023C48	6023C58
Frequency range	MHz	5-694	5-774
Cut off channel	-	48	58
Insertion loss	dB	1	1
LTE rejection	dB	30	30
GSM rejection	dB	25	25
DC power pass	mA	500	500
Connectors	-	2 x F female	2 x F female
Mounting	-	Indoor Use	Indoor Use
Dimensions	mm	72 x 22 x 17	72 x 22 x 17



Distribution Accessories

6030C48(C58) - 6024C48(C58)(C59) - 6025C60 - 6040C48(C58)(C59) LTE (4G) (Tetra) Filters

- 20 dB LTE rejection
- indoor use (direct plug-in mounting behind TV)
- IEC connectors

6030C48 | 6030C58



NEW

6030C48 | 6030C58

	MHz	5-694	5-774
Frequency range			
Cut off	-	58	
Insertion Loss	dB	1	
LTE (4G) rejection	dB	20	
GSM rejection	dB	25	
DC power pass	mA	500	
Connectors	-	IEC male/female	
Mounting	-	Indoor Use	
Dimensions	mm	67 x 33 x 22	



- high LTE (4G/5G) rejection
- indoor and outdoor mountable

6024C48 | 6024C58 | 6024C59 | 6025C60

NEW

6024C48 | 6024C58 | 6024C59 | 6025C60

	MHz	5-694	5-774	5-782	5-790
Frequency range					
Cut off channel	-	48	58	59	60
Insertion loss	dB	2,5	2,5	2,5	1,5
LTE (4G/5G) rejection	dB	40	45	40	30
GSM rejection	dB	15	15	15	No
DC power pass	mA	500	500	500	500
Connectors	-	2 x F female	2 x F female	2 x F female	2 x F female
Mounting	-	Indoor/outdoor (indoor flange provided)	Indoor/outdoor (indoor flange provided)	Indoor/outdoor (indoor flange provided)	Indoor/outdoor (indoor flange provided)
Dimensions	mm	112 x 98 x 56	112 x 98 x 56	112 x 98 x 56	112 x 98 x 56

Example of indoor product



- UHF/Tetra filter
- indoor and outdoor mountable
- RED compliant

6040C48 | 6040C58 | 6040C59



Example of outdoor product

NEW

6040C48 | 6040C58 | 6040C59

	MHz	470-694	470-774	470-782
Bandwidth				
Channels	-	C21-48	C21-58	C21-59
Insertion loss	dB	1,5		
Rejection	dB	30	35	
GSM rejection	dB	30		
DC power pass	mA	500		
Connectors	-	2 x F female		
Mounting	-	Indoor/outdoor (indoor flange provided)		
Dimensions	mm	112 x 98 x 56		



Distribution Accessories

4502 - 4503 - 4504 - 4506 - 4508 Wideband Indoor Splitters 5-2400 MHz

Compatible with Wideband LNBs



- 2, 3, 4, 6, 8-way wideband splitters
- low insertion loss
- nickel plated zinc diecast housing
- "F"-type connectors
- DC power pass from all output ports to the input port (diode protection)

		4502	4503	4504	4506	4508
Way	-	2	3	4	6	8
Frequency	MHz	5-2400	5-2400	5-2400	5-2400	5-2400
Insertion loss	dB	6,5	11	11	16	18
Isolation	dB	16	20	20	20	20
Return loss in/out	dB	10	10	10	10	10
DC power pass (out/in)	-	2	3	4	6	8
Dimensions (mm)	mm	47x56x21	47x77x21	47x77x21	57x120x25	57x120x25

Distribution Accessories

1269 - 1281 - 1200A - 1353 TV Combiners

- low-loss
- indoor/outdoor use

1269



		1269	1281	1200A	1353
Inputs (DC power pass=*)	MHz	VHF: 40-230 * UHF: 470-862 *	UHF1: 470-790 * UHF2: 470-790 *	FM: 88-108 VHF-UHF: 40-68 + 175-862 (rej. FM) *	BI-FM: 40-108 * BIII: 170-230 * UHF: 470-862
Insertion loss	dB	VHF: 0,5 UHF: 1,0	UHF1: 4,5 UHF2: 4,5	FM: 1,0 VHF-UHF: 1,0 (FM rejection >20)	BI-FM: 1,0 BIII: 1,0 UHF: 2,0
Dimensions	mm	112 x 98 x 56			

Distribution Accessories

9208 - 9920 - 9501 - 9506 DiSEqC Switches - TV Sat Combiners

- DiSEqC A/B switch - 2 inputs / 1 output

9208



9208		
Number of inputs	-	2
Frequency range	MHz	950-2150
Insertion loss	dB	2
Isolation	dB	15
Switching control	-	Tone Burst and DiSEqC 1.0
Consumption	mA	25 max.
Dimensions	mm	112 x 98 x 56

9920

- switch for 2 TWIN LNB's combined with terrestrial

9920		
Frequency range	MHz	Terr.: 5-790 - Sat.: 950-2150
Insertion loss	dB	Terr.: 8 max. - Sat.: 4 max.
Switching control	dB	Tone Burst and DiSEqC 1.0/1.1
Isolation each SAT in/out	dB	40 min
Isolation SAT/TERR	dB	30 min
Current	mA	20 mA per receiver
DC power pass on SAT inputs	mA	350 max
Dimensions	mm	112 x 98 x 56



9506

- indoor/outdoor combiner
- DC power pass



9501



9501

9506

Band/Insertion loss (DC power pass=*)	MHz	VHF-UHF 5-862/1 dB	VHF-UHF 5-862/2 dB
	MHz	SAT* 950-2150 /2 dB	SAT* 950-2150 /2,5 dB
Isolation	dB	> 15 (Terr.) > 30 (Sat.)	> 15 (Terr.) > 40 (Sat.)
Note	-	indoor use	outdoor use
Dimensions	mm	61 x 51 x 16	112 x 98 x 56

Distribution Accessories

7317 - 9604 - 9653 (Satellite) Line Amplifiers

- low noise UHF line amplifier
- ideal to pump up low level signals and reject impulse noise in DTT reception
- powered with 5-24V of DTT (DVB-T) receiver

7317



7317

Band	-	UHF C 21- 69
Frequency	MHz	470-862
Gain	dB	15
Noise figure	dB	2,0
Max. Output level	dBμV	102
Consumption	mA	20
Voltage supply range	V	5 to 24
Dimensions	mm	72 x 22 x 17

- sloped gain for compensating coaxial cable losses
- available in 2 versions with different bandwidth
 - 950-2150 MHz
 - 40-2340 MHz (for wide band LNB applications)

9604



9604 | 9653

Frequency range	MHz	950-2150	40-2340
Gain	dB	13 (950 MHz) 18 (2150 MHz)	5 (40 MHz) 20 (2340 MHz)
Noise figure	dB	4	7
Max. Output level	dBμV	110	110
Power supply	V	13-18 / 30 mA	13-18 / 60 mA
DC power pass	mA	500 max.	500 max.
Dimensions	mm	72 x 22 x 17	68 x 26 x 16

Distribution Accessories

9609 - 9602 - 9631 Attenuator - DC Block Inserter

- small housing
- adjustable attenuation: 0-20 dB
- DC power pass


9609



9609		
Frequency range	MHz	700-2150
Attenuation	dB	0-20 adjustable
DC power pass	-	yes
Dimensions	mm	77 x 22 x 17

- block DC voltage to receiver
- pass DC voltage to LNB

9602

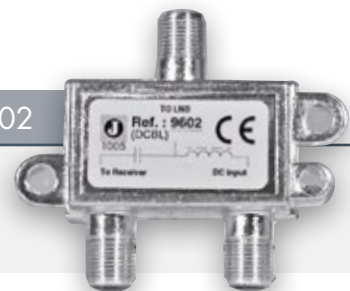

9602		
Frequency range	MHz	40-2150
Insertion loss	dB	1
DC power pass	mA	500 max.
Dimensions	mm	61 x 51 x 16

- block DC voltage from input to output

9631



9631		
Frequency range	MHz	5-2300
Attenuation	dB	1
Dimensions	mm	72 x 22 x 17

Distribution Accessories

9620 - 9337 F-F Galvanic Isolator - Priority Switch

- high galvanic isolation of both center and shield
- small design

9620



9620

Frequency range	MHz	5-2150
Galvanic isolation	VDC	400-800
Capacitor value	nF	center: 1 / shield:4
Dimensions	mm	51 x 14 x 14

- priority switching
- signaling bypass to LNB

9337



9337

Frequency range:	MHz	950 - 2150
Insertion loss	dB	< 3,5
Isolation	dB	> 15
Signaling bypass to LNB	-	22 KHz tone and 13/18V power
Switch control	-	Priority receiver gets priority (if voltage >10V)
DC loss	V	1.0 max.
Dimensions	mm	61 x 51 x 16

Distribution Accessories

ADDITIONAL PRODUCTS

TAPS

4510	1 way tap	5-2300 MHz, 10 dB
4511	1 way tap	5-2300 MHz, 15 dB
4512	1 way tap	5-2300 MHz, 20 dB
4513	1 way tap	5-2300 MHz, 25 dB
4520	2 way tap	5-2300 MHz, 10 dB
4521	2 way tap	5-2300 MHz, 15 dB
4522	2 way tap	5-2300 MHz, 20 dB
4523	2 way tap	5-2300 MHz, 25 dB
4524	2 way tap	5-2300 MHz, 30 dB
4540	4 way tap	5-2300 MHz, 12 dB
4541	4 way tap	5-2300 MHz, 15 dB
4542	4 way tap	5-2300 MHz, 20 dB
4543	4 way tap	5-2300 MHz, 25 dB
4544	4 way tap	5-2300 MHz, 30 dB
4561	6 way tap	5-2300 MHz, 15 dB
4562	6 way tap	5-2300 MHz, 20 dB
4563	6 way tap	5-2300 MHz, 25 dB
4581	8 way tap	5-2300 MHz, 15 dB
4582	8 way tap	5-2300 MHz, 20 dB
4583	8 way tap	5-2300 MHz, 25 dB

INDEX

1000		5531	09	8703	20	9955	45
1200 A	79	5600	22			9958	45
1269	79	5951	10	9000		9959	45
1281	79	5952	10	9208	80	9980	45
1353	79			9337	83	9981	45
		6000		9501	80	9984	45
2000		6022GSM	76	9506	80	9985	45
2436	72	6023C48	76	9602	82		
2460	39	6023C58	76	9604	81	KIT	
2460 UK	39	6023C59	76	9609	82	KIT 7316/2430A	73
2461	40	6024C48	77	9620	83	KIT 7322/2436	68
2462	39	6024C58	77	9631	82	KIT 7322L2/2436	68
2462 UK	39	6024C59	77	9645 KIT	38	KIT 7328/2436	68
		6025C60	77	9646	49	KIT 7329/2436	68
4000		6030C48	77		48	KIT 7332/2436	68
4030	61	6030C58	77	9653	81	KIT 7404/2430A	73
449X	45	6040C48	77		43	KIT 7415/2430A	73
4492	45	6040C58	77	9654	48	KIT 7422/2430A	73
4494	45	6040C59	77	9655	49	KIT 7422E/2430AE	73
4498	45	6503L	59	9656	49	KIT 7490/2430A	73
4502	78	6503L UK	59	9669	41		
4503	78	6504	59	9671L	67		
4504	78	6504 UK	59	9672L	67		
4506	78	6700	56	9674L	67		
4508	78	6702	57	9720	48		
4510	84	6710	58	9721	28		
4511	84	6712	58	9725	29		
4512	84			9729	28		
4513	84	7000		9731	30		
4520	84	7211	73	9732	30		
4521	84	7316	73	9733	31		
4522	84	7317	81	9734	31		
4523	84	7322	69	9735	31		
4524	84	7322L2	69	9738	32		
4540	84	7327	69	9739	33		
4541	84	7327L2	69	9744	34		
4542	84	7328	69	9746	34		
4543	84	7329	69	9748	34		
4544	84	7332	70	9754	35		
4561	84	7410	73	9754 A	35		
4562	84	7415L2	71	9758	35		
4563	84	7460L2	71	9758 A	35		
4581	84	7720	65	9774	36		
4582	84	7720L	65	9775	36		
4583	84	7720L2	65	9780	37		
4603	40	7722	65	9830	25		
		7722L	65	99XX	45		
5000		7722L2	65	9920	80		
5050W	16	7722L2	65	993X	44		
5051W	16	7724L	66	9930	42		
5062W	17	7724L2	66	9930 UK	42		
5065W	17	7781	64	9933	39		
5066W	17	7784	64	9933 UK	39		
5230	14	7785	64	9935	43		
5240	15	8000		9937	44		
5330	13	8180	22	9938	44		
5380	13	8201	23	9939	44		
5400	25	8202	23	9942	45		
5500	06	8203	23	9943	45		
5501	06	8210	24	9946	45		
5510	07	8600	21	9947	45		
5520	08	8700	20	9950	45		
5530	09	8701	20	9951	45		
				9954	45		

Our flexible team offers you
for **every evolution**
a **custom made solution**



UNITRON NV | Frankrijklaan 27 | B-8970 Poperinge | Belgium

T + 32 57 33.33.63 | **F** + 32 57 33.45.24

sales@unitrongroup.com | www.unitrongroup.com