

KIT 7329

7329 : UHF Preamplifier 15-35 dB

2436 : Power Supply

UNITRON n.v.

Frankrijklaan 27
B-8970 Poperinge, Belgium
www.unitrongroup.com

Elektro HERINK s.r.o.
Wenzigova 79/8, 301 00 Plzeň
www.elektroherink.cz

Technical specifications


2436

Outputs	2
Female F-type connectors	
Insertion loss	4 – 5 dB
Protection between outputs	10 dB
Secondary DC power stabilized	24 V DC
Power	230 V~ ± 10%, 50 Hz / 4,6W
Efficiency level	VI
Output current	150 mA
Security	
Overload and short circuit protected	
Double isolated	
Dimensions	95 x 76 x 35 mm

7329

Frequencies	470-694 MHz
Gain	15-35 dB
Noise figure	3,5 dB
Max. input level	82 dBμV
Max. output level	104 dBμV
Power supply	24 VDC
Consumption	35 mA
Dimensions	120 x 115 x 50 mm.

Application

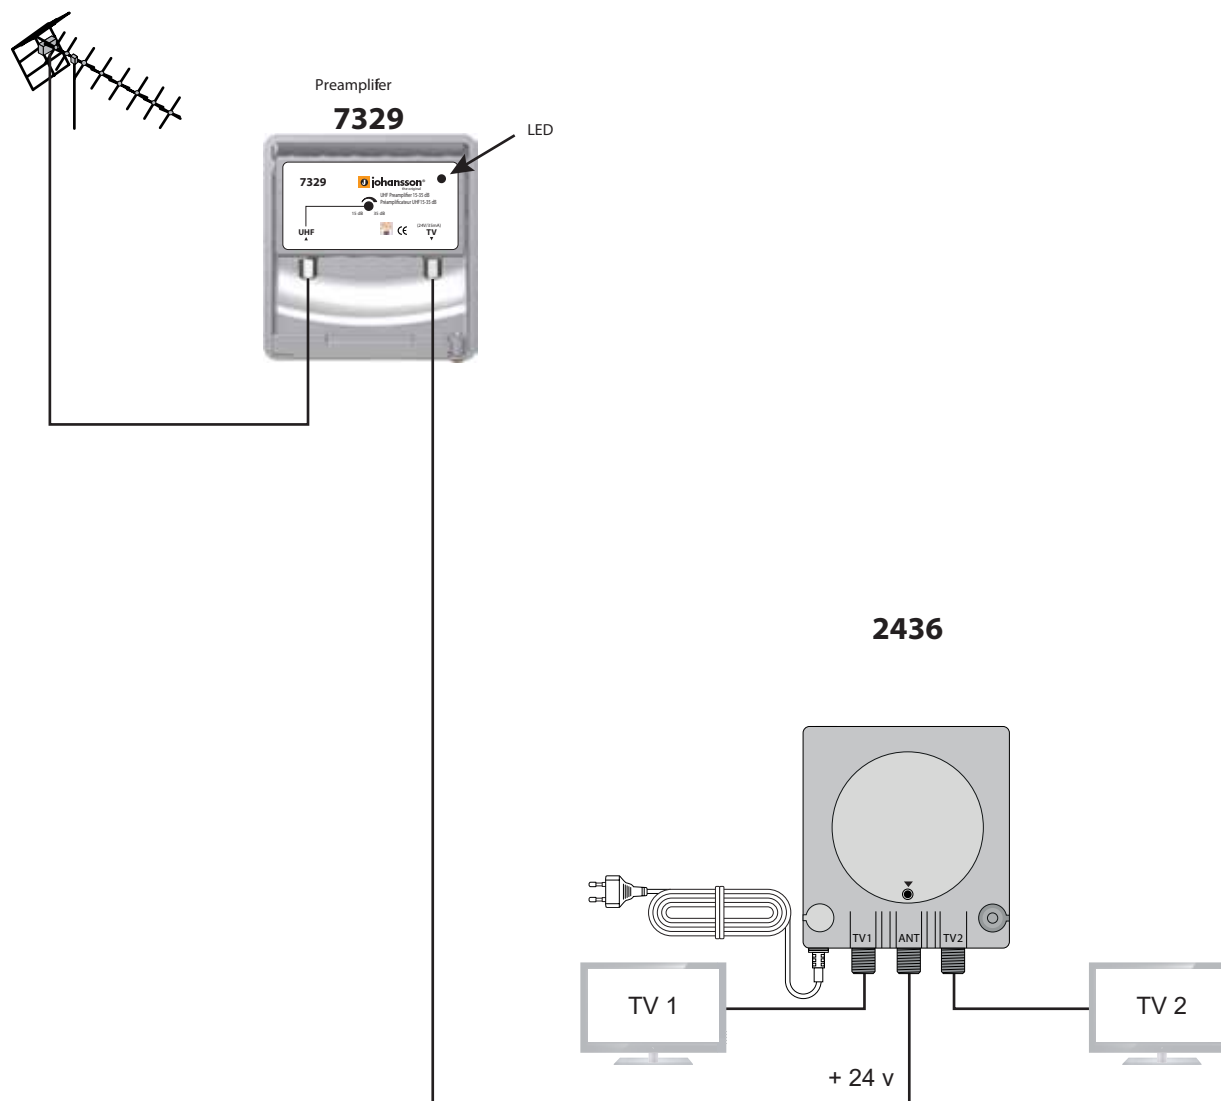

Note: When connecting one output only, load the second output with 75 Ohm