

Technical specifications

- Inputs :	B III	UHF	UHF
- Frequency range :	170-230 MHz	470-862 MHz	470-862 MHz
- Gain :	10-30 dB	25-40 dB	25-40 dB
- Noise figure :	3.5 dB	3.5 dB	3.5 dB
- Max. input level :	95 dBμV	80 dBμV	80 dBμV
- Max. output level :	105 dBμV		
- Consumption :	75 mA / 24 V		
- Connectors :	F		
- Mounting :	Mast or wall		
- Dimensions :	112 x 98 x 56 mm		

07/03



UNITRON n.v.

Frankrijklaan 27
B-8970 Poperinge, Belgium
www.johansson.be


Elektro HERINK s.r.o.
Wenzigova 79/8, 301 00 Plzeň
www.elektroherink.cz



REF. 7410

3 inputs preamplifier - combiner

How to make your connections

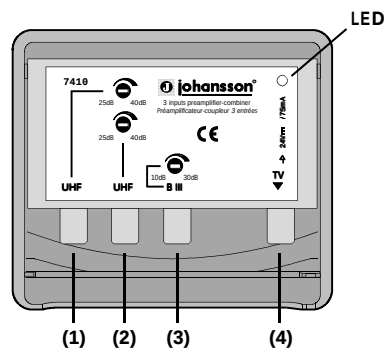

- (1) = To UHF antenna,
- (2) = To UHF antenna
- (3) = To VHF (B III) antenna
- (4) = To TV (+24V)

Application

